


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

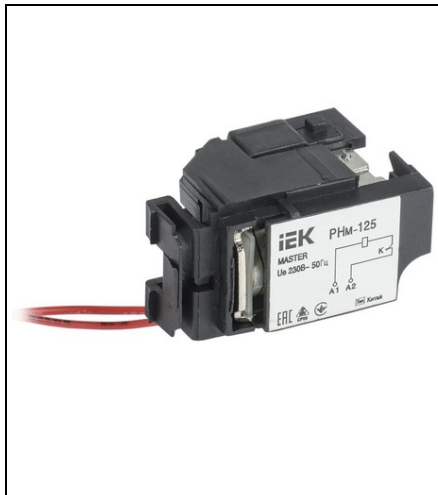

IEK SHUNT RELEASE RNM-125 (RNM-32) 220V MASTER

RNm shunt trip is used for remote shutting down of MCCB. Ease of use.
The ability to install independently in production by the customer. Operating voltage range: $(0,7...1,1)N...U_e$
Operating temperature range: $-40...+60$
Number of contacts as normally open contact: 0
Number of contacts as normally closed contact: 0
Number of contacts as change-over contact: 0
End value adjustment range undelayed short-circuit release: -
Initial value of the undelayed short-circuit release - setting range: -
Rated control supply voltage U_s at DC: -
Rated control supply voltage U_s at AC 50HZ: 230; 400
Nominal rated voltage: 230; 400
Compatibility: $\text{D'D88 N\text{D}\mu\text{N}\text{€}\text{D, D, MASTER}$
Voltage type for actuating: EV000460
Mains frequency: 50
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/shunt-release-rnm-125-rnm-32-220v-master-307515>