


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

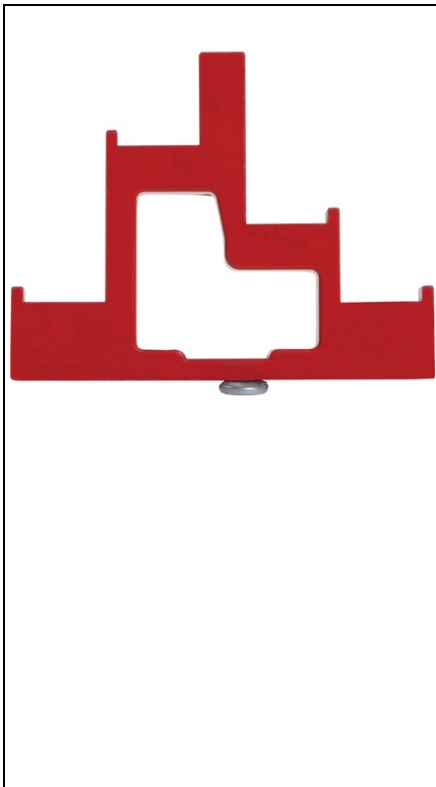

IEK IZOLATOR IN TREPTE IS4-25/1-15 (4 X M6; 1 X M5) POWER

IEK brand stepped bus insulators are intended for rigid fixing and insulation of current-conducting buses inside the electric panels, busbar bridges and other equipment. This insulator guarantees the absence of disruptive discharges between the buses and can be used in AC and DC electric equipment of 50 Hz and voltage under 1000 V. Insulator casing is made of special mechanical impact-resistant non-flammable polymer notable for its high electrical resistance ratings. Insulator casing is made of special mechanical impact-resistant non-flammable polymer notable for its high electrical resistance

- Number of poles: 5
- Busbar distance: 20,5...30
- Nominal rated voltage: 660
- Withstand lightning pulse voltage: 7.5
- Weight: 170
- Thread length: 10
- Thread size metric (M.): 6; 5
- Ambient temperature: -60...+80
- Short-term withstand voltage of industrial frequency: 2.5
- Breakdown voltage of industrial frequency insulation: 6.0
- Bending strength: 125
- Tightening torque of bus attachment screws: 5.0
- Destructive torque: 25
- Diameter of holes for fastening screws in buses: 6.6
- Width: 135.0
- Height: 105.0
- Depth: 18.0
- Colour: EV000233
- Material: IEK V0000465
- Material quality: IEK V0000467
- Max. rated current: 530
- Pret: 25,79 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/izolator-in-trepTE-is4-25-1-15-4-x-m6-1-x-m5-power-308945>