


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

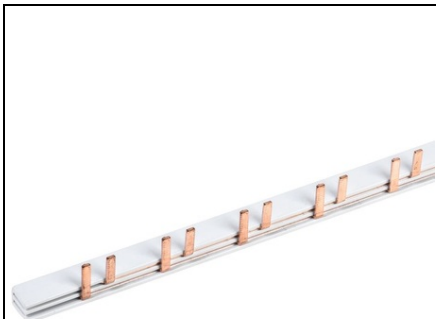

IEK BUSBAR CONNECTION TYPE PIN (PIN) 63A 54 MODULE PENTRU DIFFERENTIAL CIRCUIT BREAKERS (1M)

It provides convenient and quick connection of the groups of differential circuit breakers of AVDT32M (RCBO) series with displaced location of the input terminals. Buses designed for 63A rated current, can be used at a rated current of 100A, if the input machine is connected in the center. The bus for AVDT32M (RCBO) for 108 modules provides PIN outputs every 9mm (layout of 1/2+1/2 modules). Made of copper plates and placed in a plastic insulating flame-retardant housing.

Wire material - electrical copper grade of M1 grade (Cu 99.9%). Maximum number of connected devices: 27

Pitch dimensions: 9

Cross section: 182

Length: 1000

Rated permanent current I_u : 63

Type of electric connection: EV000158

Rated surge voltage: 4

Rated short-time withstand current I_{cw} : ≥ 12

Height: 21.4

Width: 17.5

Number of poles (total): 2

Nominal voltage: 230/400

Ambient temperature: -45...+40

Rated insulation voltage U_i : 600

Number of phases: 2

Pollution degree: 2

Primary current: 63

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/busbar-connection-type-pin-pin-63a-54-module-pentru-differential-circuit-breakers-1m-309198>