


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

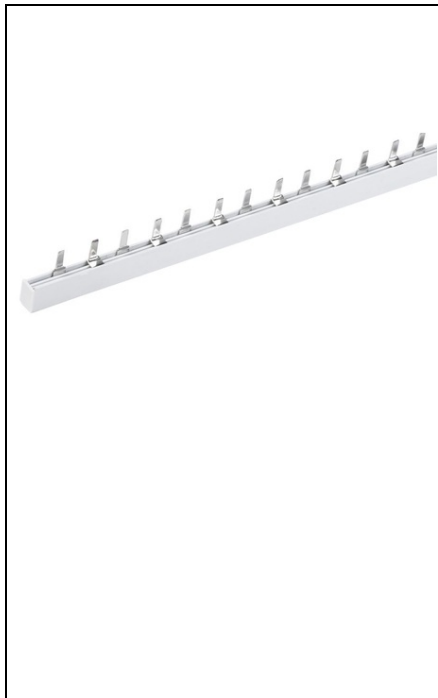

IEK BUS BAR TYPE PIN (PIN) 2P 63A TINNED (1M)

Tin-coated PIN 63 A busbars have increased corrosion resistance and provide a convenient and safe connection of groups of modular circuit breakers. High corrosion resistance of busbar material.

Enclosure material: non-combustible plastic (hot wire test at 960°C).

Maximum operating current: up to 63 A.

Busbar material: M1 electrical copper (Cu 99,9%).

Wide operating temperature range: -45°C to +40°C. Maximum number of connected devices: 54

Pitch dimensions: 18

Cross section: 154

Length: 1000

Rated permanent current Iu: 63

Type of electric connection: EV000158

Rated surge voltage: 4

Rated short-time withstand current Icw: 12

Height: 27.4

Width: 10.0

Number of poles (total): 2

Nominal voltage: 230/400

Weight: 0,48

Ambient temperature: -45...+40

Rated insulation voltage Ui: 600

Number of phases: 2

Primary current: 63

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/bus-bar-type-pin-pin-2p-63a-tinned-1m-309200>