


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

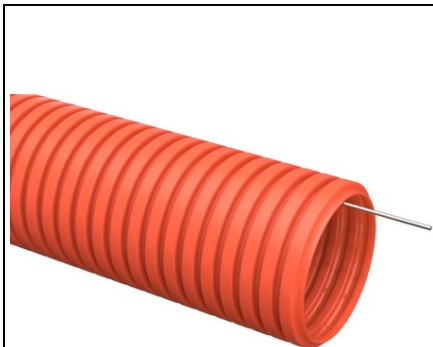

**IEK CORRUGATED HDPE PIPE WITH A BROACH TOOL D25 ORANGE  
(50 M)**

Orange HDPE corrugated pipes are designed for laying them in the information power and low-current electrical communication systems. HDPE corrugated pipes sustain combustion, so their scope of application is limited to laying hidden in nonflammable materials. Installation conditions: for nonexposed installation in the conduit of the walls, in ceilings, in floor layers made of non-combustible materials. Corrugated pipe HDPE orange color is characterized by high elasticity and impact strength.

The wide temperature range allows installation and operation of corrugated HDPE pipes at temperatures from -40°C to +90°C. Degree of protection (IP): EV006415

Colour: EV000236

RAL-number: 2004

Outer diameter: 25

Material: EV003904

Operating temperature: -40...90

Compressive strength: 125

Nominal diameter: 25

Inner diameter: 18.6

Bending strength: EV000995

Nominal electric insulation strength: 250

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/corrugated-hdpe-pipe-with-a-broach-tool-d25-orange-50-m-310112>