


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

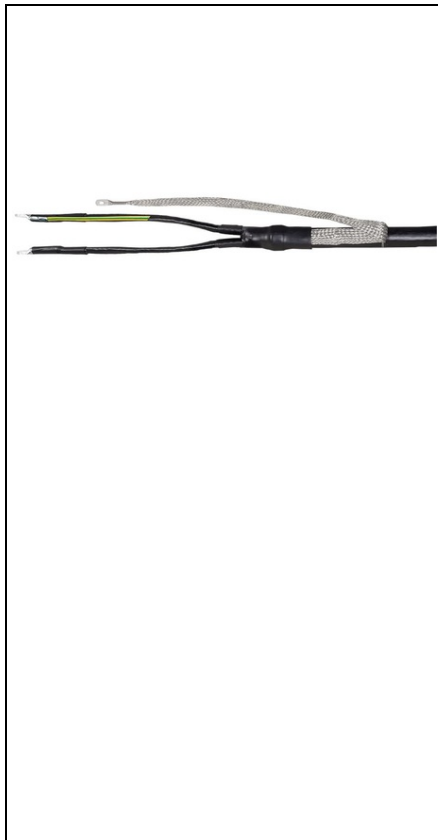

### **IEK TERMOCONTRACTIBIL PKVTPBE 2X16/25 WITH PVC ISOLATION 1KV**

PKV(N)tpbe-1 and PKVtpbe-1 heat-shrink sleeves are designed for termination of aluminum or copper conductors of cables with plastic, rubber and polyethylene insulation with armor or shield for voltages up to 1 kV: AVBbShv-1, VBbShv-1, AVVB-1, AVVBG-1, VVB-1, VVBG-1, APvBbShv-1, PvBbShv-1, VVGE, AVVGE, PvVGE, APvVGE, their equivalents and versions. The product's range is developed for 1-, 2-, 3-, 4- and 5-core cables. The sleeve can be used with armored and shielded cables and includes a kit of soldered or not soldered grounding options. The soldered grounding kit contains constant force springs (CFS) made from high-quality stainless steel AISI 301 with high content of chromium and nickel, that ensure reliable and safe connection of PML grounding bus to cable armor bands.

Use of high-quality two-layer heat-shrink materials with adhesive thermomelting coating on inner surfaces of tubes and multiple cable joints ensures perfect tightness of the sleeve construction. Suitable for: EV009729

Model: EV004267

Voltage row: EV004258

Nominal cross section: 16...25

Type of insulation material: IEK\_V0000184

Installation Type: IEK\_V0000187

Complete set: IEK\_V0000188

Number of cores wiring: 2

Tip Type: IEK\_V0000189

Attachment of the grounding bus to the cable: IEK\_V0000192

Nominal voltage: 1

Material: IEK\_V0000193

Min full shrinkage temperature: 120

Operating temperature range: -45...+50

Shrink rate: EV009535

External grounding bus attachment: IEK\_V0000194

Number of conductors: 2

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/termocontractibil-pkvtpbe-2x16-25-with-pvc-isolation-1kv-310551>