


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

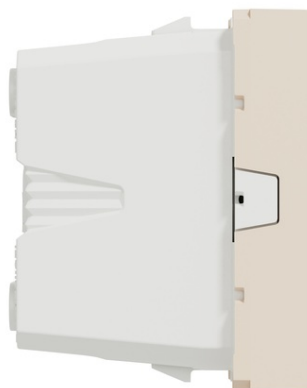

SCHNEIDER EUROAMERICAN PRIZA, NEW UNICA, 2P, EU US, 1 MODULE, OBTURATSAUOSU, BEJ

Schneider Electric New Unica socket-outlet NU302144 is a mechanism in color beige. The outlet pole configuration of this socket-outlet is 2P with shutters, ensuring safety protection. And this device is Euroamerican standard. The dielectric strength, which means the electrical strength of its insulator, is 2000V. Its rated current is 15A,16A. Clip-in this socket-outlet for the fixation. It is 22.5 mm in width, 45 mm in height and 33 mm in depth with an embedding depth of 24 mm. Its matching mounting box can be recessed into the surface of the wall with flush type. The surface finish is brilliant, gaining extra point for your interior design. The IP rating of this device is IP20. Besides, it reaches IK01 protection level, which can help protect against impact. This socket-outlet has screw terminals connection terminals.. Being made of ASA + PC, PBT (polybutylene terephthalate) material, this skin is reliable and resistant. It obtained FR.ME63.B02375 AC certificate. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements.Main

Range - New Unica

Product or component type - Socket-outlet

device presentation - Mechanism

device mounting - Flush

Socket number - 1

Outlet poles configuration - 2P

outlet standard - Euroamerican

Rated current - 16 A

Complementary

Device application - Power supply

Cover type - With shutter

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Number of modules - 1 module

Fixing mode - Clip-in

Colour tint - Beige (RAL 1013)

Connections - terminals - Screw terminals

Cable cross section - 0.5-4 mm² cable(s), 2 - cable stiffness: flexible

0.5-4 mm² - cable stiffness: rigid

Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6

Electrical durability - 10000 cycles, cos phi = 0.8

Insulation resistance - > 5 MOhm at 500 V

Dielectric strength - 2000 V

Material - PC: mechanism cover

PC (polycarbonate) GF10 FR: casing

Surface finish - Glossy

Quantity per set - Set of 1 flow-pack

Standards - IEC 60884-1

Embedding depth - 24 mm

Depth - 35.5 mm

Width - 22.5 mm

Height - 45 mm

Net weight - 0.0193 kg

Surface treatment - Untreated

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

Ambient air temperature for operation - -5 to 35 A°C

Ambient air temperature for storage - -5 to 50 A°C

IK degree of protection - IK01

IP degree of protection - IP21D

Environmental characteristic - Bleach

Oil

UV resistant

Window-cleaning fluid

Alcohol

Liquid soap

Petrol

Acetone

Packing Units

Unit Type of Package 1 - PCE

Number of Units in Package 1 - 1

Package 1 Height - 2.2 cm
Package 1 Width - 3.8 cm
Package 1 Length - 4.5 cm
Package 1 Weight - 24 g
Unit Type of Package 2 - BB1
Number of Units in Package 2 - 10
Package 2 Height - 7 cm
Package 2 Width - 12.5 cm
Package 2 Length - 18.5 cm
Package 2 Weight - 296 g
Unit Type of Package 3 - S03
Number of Units in Package 3 - 160
Package 3 Height - 30 cm
Package 3 Width - 30 cm
Package 3 Length - 40 cm
Package 3 Weight - 5.156 kg
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/euroamerican-priza-new-unica-2p-eu-us-1-module-obturatsauosu-bej-318889>