


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

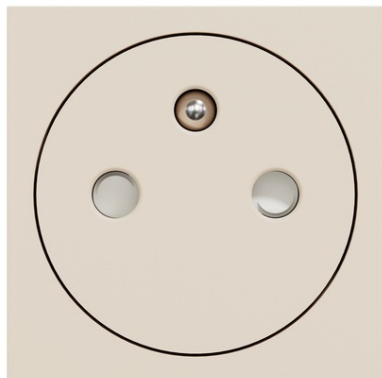

### **SCHNEIDER FRENCH PRIZA, NEW UNICA, 2PE, 16A, SCREWLESS, BEJ**

Schneider Electric New Unica socket-outlet NU305244E is a in color beige. The pole configuration of the outlet is 2P + E. This device respects the French standard. Its rated current is 16A. Its matching mounting box can be recessed into the surface of the wall with flush type. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range - New Unica

Device application - Power supply

Product or component type - Socket-outlet

device presentation - Mechanism

Socket number - 1

Outlet poles configuration - 2P + E

outlet standard - French

Outlet standard description - Pin earth

Complementary

Cover type - With shutter

device mounting - Flush

Rated current - 16 A

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Number of modules - 2 modules

Fixing mode - Clip-in

Colour tint - Beige (RAL 1013)

Connections - terminals - Screwless terminals

Cable cross section - 0.5-2.5 mm<sup>2</sup> cable(s), 2 - cable stiffness: flexible

0.5-2.5 mm<sup>2</sup> cable(s), 2 - cable stiffness: rigid

Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6

Electrical durability - 10000 cycles, cos phi = 0.8

Insulation resistance - > 5 MΩm at 500 V

Dielectric strength - 2000 V

Material - PC; mechanism cover

PC (polycarbonate) GF10 FR: casing

Surface finish - Glossy

Quantity per set - Set of 1 flow-pack

Standards - IEC 60884-1

UNE 20315-1-1

UNE 20315-1-2

NF C 61-314

Product certifications - AENOR

NF

Embedding depth - 29 mm

Depth - 38 mm

Width - 45 mm

Height - 45 mm

Net weight - 0.033 kg

Surface treatment - Untreated

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

Ambient air temperature for operation - -5 to 35 A°C

Ambient air temperature for storage - -5 to 50 A°C

IK degree of protection - IK04

IP degree of protection - IP4X

Environmental characteristic - Acetone

Bleach

UV resistant

Petrol

Oil

Alcohol

Window-cleaning fluid

Liquid soap

Packing Units

Unit Type of Package 1 - PCE

Number of Units in Package 1 - 1

Package 1 Height - 3.85 cm

Package 1 Width - 4.5 cm

Package 1 Length - 4.5 cm  
Package 1 Weight - 33.0 g  
Unit Type of Package 2 - BB1  
Number of Units in Package 2 - 10  
Package 2 Height - 5.5 cm  
Package 2 Width - 14.0 cm  
Package 2 Length - 26.0 cm  
Package 2 Weight - 427.0 g  
Unit Type of Package 3 - S01  
Number of Units in Package 3 - 20  
Package 3 Height - 15.0 cm  
Package 3 Width - 15.0 cm  
Package 3 Length - 40.0 cm  
Package 3 Weight - 1.054 kg  
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/french-priza-new-unica-2pe-16a-screwless-bej-318915>