


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

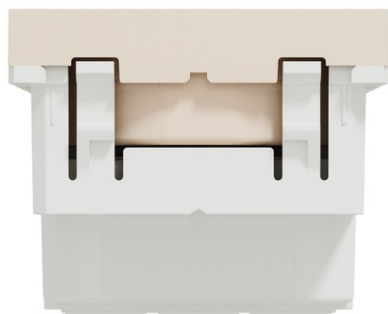

### **SCHNEIDER FRENCH PRIZA, NEW UNICA, 2PE, 16A, SCREWLESS, OBTURATSAUOSU, BEJ**

Schneider Electric New Unica socket-outlet NU305944E is a mechanism in color beige. The outlet pole configuration of this socket-outlet is 2P + E with shutters, ensuring safety protection. And this device is French standard. The dielectric strength, which means the electrical strength of its insulator, is 2000V. Its rated current is 16A. The device's fixing mode is clip-in. It is 45 mm in width, It is 45 mm in height, 37 mm in depth with an embedding depth of 27 mm. Its matching mounting box can be recessed into the surface of the wall with flush type. The IP rating of this device is IP20. Besides, it reaches IK01 protection level, which can help protect against impact. This socket-outlet has screwless terminals connection terminals. The socket-outlet is made of ASA + PC, making it as resistant as possible. This socket-outlet is FR.ME63.B02375 AC certified. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range - New Unica

Product or component type - Socket-outlet

device presentation - Mechanism

device mounting - Flush

Socket number - 1

Outlet poles configuration - 2P + E

outlet standard - French

Outlet standard description - Pin earth

Rated current - 16 A

Complementary

Device application - Power supply

Cover type - With shutter

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Number of modules - 2 modules

Fixing mode - Clip-in

Colour tint - Beige (RAL 1013)

Connections - terminals - Screwless terminals

Cable cross section - 0.5-2.5 mm<sup>2</sup> cable(s), 2 - cable stiffness: flexible

0.5-2.5 mm<sup>2</sup> cable(s), 2 - cable stiffness: rigid

Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6

Electrical durability - 10000 cycles, cos phi = 0.8

Insulation resistance - > 5 MΩm at 500 V

Dielectric strength - 2000 V

Material - PC: mechanism cover

PC (polycarbonate) GF10 FR: casing

Surface finish - Glossy

Quantity per set - Set of 1 flow-pack

Standards - IEC 60884-1

UNE 20315-1-1

UNE 20315-1-2

NF C 61-314

Product certifications - AENOR

NF

Embedding depth - 27 mm

Depth - 37 mm

Width - 45 mm

Height - 45 mm

Net weight - 0.033 kg

Surface treatment - Untreated

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

Ambient air temperature for operation - -5 to 35 A°C

Ambient air temperature for storage - -5 to 50 A°C

IK degree of protection - IK04

IP degree of protection - IP4X

Environmental characteristic - Bleach

Oil

UV resistant

Liquid soap

Alcohol

Acetone

Petrol  
Window-cleaning fluid  
Packing Units  
Unit Type of Package 1 - PCE  
Number of Units in Package 1 - 1  
Package 1 Height - 4.0 cm  
Package 1 Width - 4.5 cm  
Package 1 Length - 4.5 cm  
Package 1 Weight - 31.0 g  
Unit Type of Package 2 - BB1  
Number of Units in Package 2 - 10  
Package 2 Height - 6.0 cm  
Package 2 Width - 14.5 cm  
Package 2 Length - 26.0 cm  
Package 2 Weight - 382.0 g  
Unit Type of Package 3 - S04  
Number of Units in Package 3 - 240  
Package 3 Height - 30.0 cm  
Package 3 Width - 40.0 cm  
Package 3 Length - 60.0 cm  
Package 3 Weight - 9.812 kg  
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/french-priza-new-unica-2pe-16a-screwless-obturatsausu-bej-318919>