


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

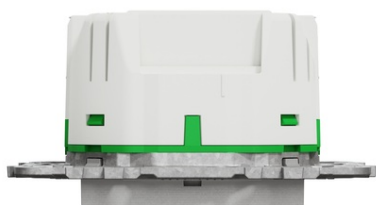

SCHNEIDER CONNECTED SINGLE PRIZA, NEW UNICA, 16 A, PIN, ALUMINIU

This Schneider Electric Wiser New Unica connected schuko socket outlet with shutter ensuring safety protection with earthing pin. This device respects the German standard. The operating voltage is 250VAC 50/60Hz. Its rated current is 16A. The dielectric strength, a measure of the electrical strength of a material as an insulator, is 2000V. Easy installation, screwdriver is not required to connect the cables, thanks to the screwless connection. The dimension of the product is (W) 74.5mm x (H) 74.5mm x (D) 40mm. The Embedded depth is 30.5mm. The socket outlet is made of PC material. And the color of the product is Aluminium with a glossy finish. It is compatible with ambient air temperature for operation between 5A°C to 35A°C. It reaches IP20 and IK05 degrees of protection. Delivered in set of 1 Box packaging. To be completed with the cover frame. The device is fixed with 4 fixing points. New Unica is designed with clever features to be flexible, easy to understand, and quick to install providing solutions for all customer's requirements. It is designed for sustainable living in environmentally conscious households. New Unica includes a suite of new designs, colors, and materials. Users benefit from beautiful designs that match their style and innovative products. This device is compliant with NF certification. Main

Range - New Unica

Device application - Power supply

Product or component type - Connected socket-outlet

device presentation - Mechanism with zamak fixing frame

Socket number - 1

Outlet poles configuration - 2P + E

outlet standard - French

Outlet standard description - Pin earth

Complementary

Cover type - With shutter

device mounting - Flush

Rated current - 16 A

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Number of modules - 2 modules

Fixing mode - 4 fixing points

Colour tint - Aluminium

Connections - terminals - Screwless terminals

Cable cross section - 0.5-2.5 mm² cable(s), 2 - cable stiffness: flexible

0.5-2.5 mm² cable(s), 2 - cable stiffness: rigid

Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6

Electrical durability - 10000 cycles, cos phi = 0.8

Insulation resistance - > 5 MOhm at 500 V

Dielectric strength - 2000 V

Material - PC: mechanism cover

Zamak: fixing frame

PC (polycarbonate) GF10 FR: casing

Surface finish - Painted

Quantity per set - Set of 1 box

Standards - IEC 60884-1

NF C 61-314

Product certifications - NF

Embedding depth - 30.5 mm

Depth - 40 mm

Width - 74.5 mm

Height - 74.5 mm

Net weight - 0.0739 kg

Surface treatment - Painted

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

Ambient air temperature for operation - -5 to 35 A°C

Ambient air temperature for storage - -5 to 50 A°C

IK degree of protection - IK05

IP degree of protection - IP20

Environmental characteristic - Acetone

UV resistant

Petrol

Oil

Window-cleaning fluid

Liquid soap

Packing Units
Unit Type of Package 1 - PCE
Number of Units in Package 1 - 1
Package 1 Height - 7.7 cm
Package 1 Width - 9.5 cm
Package 1 Length - 9.5 cm
Package 1 Weight - 162.0 g
Unit Type of Package 2 - S03
Number of Units in Package 2 - 36
Package 2 Height - 30.0 cm
Package 2 Width - 30.0 cm
Package 2 Length - 40.0 cm
Package 2 Weight - 6.273 kg
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/connected-single-priza-new-unica-16-a-pin-aluminiu-318939>