


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

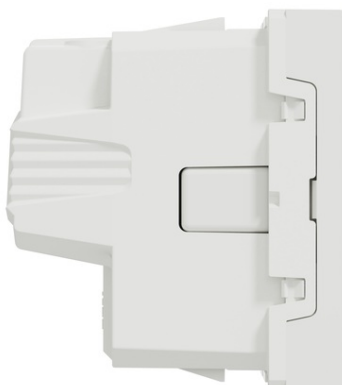

SCHNEIDER PRIZA, NEW UNICA, MECANISM, 2P E, 16A, SCHUKO,
CU OBTURATSAU, LUCIOS, ALB

Main
Range - New Unica
Product or component type - Socket-outlet
device presentation - Mechanism
device mounting - Flush
Socket number - 1
Outlet poles configuration - 2P + E
outlet standard - Schuko
Outlet standard description - Side earth
Rated current - 16 A
Complementary
Device application - Power supply
Cover type - With shutter
[Ue] rated operational voltage - 250 V
Network type - AC
Network frequency - 50/60 Hz
Number of modules - 2 modules
Fixing mode - Clip-in
Colour tint - White (RAL 9003)
Connections - terminals - Screw terminals
Cable cross section - $0.5 \leq 4 \text{ mm}^2$ - cable stiffness: flexible
 $0.5 \leq 4 \text{ mm}^2$ - cable stiffness: rigid
Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, $\cos \phi = 0.6$
Electrical durability - 10000 cycles, $\cos \phi = 0.8$
Insulation resistance - $> 5 \text{ MOhm}$ at 500 V
Dielectric strength - 2000 V
Material - PC: mechanism cover
PC (polycarbonate) GF10 FR: casing
Surface finish - Glossy
Quantity per set - Set of 1 flow-pack
Standards - IEC 60884-1
UNE 20315-1-1
UNE 20315-1-2
Product certifications - AENOR
EAC
Embedding depth - 30 mm
Depth - 40 mm
Width - 45 mm
Height - 45 mm
Net weight - 0.033 kg
Resistance to chemical agents - Resistant to alcohol (70 %)
Resistant to alcohol (96 %)
Resistant to A-Lactic Acid
Resistant to diluted quaternary ammonium
Resistant to diluted bleach
Resistant to diluted ammonia
Resistant to soapy water
Resistant to crystal cleaner
Resistant to hydrogen peroxide 10 volumes
Resistant to hexane
Environment
Ambient air temperature for operation - $-5 \leq 35 \text{ A}^\circ\text{C}$
Ambient air temperature for storage - $-5 \leq 50 \text{ A}^\circ\text{C}$
IK degree of protection - IK01
IP degree of protection - IP21D
Environmental characteristic - Acetone
UV resistant
Petrol
Oil
Window-cleaning fluid
Liquid soap
Packing Units
Unit Type of Package 1 - PCE
Number of Units in Package 1 - 1
Package 1 Height - 4.0 cm
Package 1 Width - 4.5 cm
Package 1 Length - 4.5 cm
Package 1 Weight - 33.0 g
Unit Type of Package 2 - BB1
Number of Units in Package 2 - 10
Package 2 Height - 8.2 cm
Package 2 Width - 17.8 cm
Package 2 Length - 24.8 cm
Package 2 Weight - 431.3 g
Unit Type of Package 3 - S04
Number of Units in Package 3 - 140

Package 3 Height - 30.0 cm
Package 3 Width - 40.0 cm
Package 3 Length - 60.0 cm
Package 3 Weight - 6.741 kg
Pret: 17,59 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/priza-new-unica-mecanism-2p-e-16a-schuko-cu-obturatsau-lucios-alb-318941>