


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

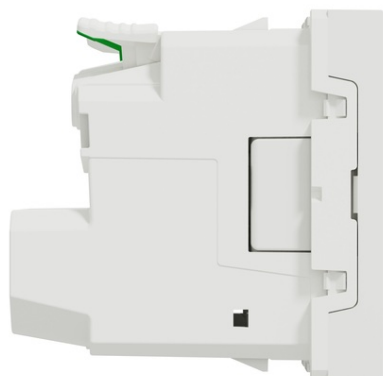

SCHNEIDER FRENCH PRIZA, NEW UNICA, 2PE, 16 A , SCL, SURGE PROTECTION, ALB

Schneider Electric New Unica socket-outlet NU305918EP is a mechanism in color white. The outlet pole configuration of this socket-outlet is 2P + E with shutters, ensuring safety protection. And this device is French standard. The dielectric strength, which means the electrical strength of its insulator, is 2000V. Its rated current is 16A. Clip-in this socket-outlet for the fixation. It is 45 mm in width, 45 mm in height 38 mm in depth with an embedding depth of 28.7 mm. Its matching mounting box can be recessed into the surface of the wall with flush type. The surface finish is glossy, delivering an elegant and high-end feeling to a room. The IP rating of this device is IP21D which is very high. Besides, it reaches IK04 protection level, which can help protect against impact. This socket-outlet has screwless terminals connection terminals. Being made of PC material, this socket-outlet is quite reliable and resistant. This socket-outlet is NF certified. As a green premium product, this device is environmentally friendly. It is mercury free. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements.

Main
 Range of product - New Unica
 aesthetic name - New Unica
 Product or component type - Socket-outlet
 device presentation - Mechanism
 Outlet poles configuration - 2P + E with shutters
 Outlet standard - French
 Outlet standard description - Pin earth
 Cover plate colour tint - White
 White (RAL 9003)
 Quantity per set - 1 box
 Complementary
 Protection type - Overvoltage protection
 Rated current - 16 A at 230 V AC 50/60 Hz
 Number of modules - 2 modules
 Fixing mode - Clip-in
 Pilot light - LED, colour: green and red
 Connections - terminals - Screwless terminals
 Cable cross section - 4 mm² flexible cable
 0.5 mm² flexible cable
 4 mm² rigid cable
 0.5 mm² rigid cable
 Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6
 Electrical durability - 10000 cycles, cos phi = 0.8
 Insulation resistance - > 5 MOhm at 500 V
 Material - PC: mechanism cover
 PC (polycarbonate) GF10 FR: casing
 Embedding depth - 36.7 mm
 Depth - 45.45 mm
 Width - 45 mm
 Height - 45 mm
 Net weight - 0.044 kg
 Environment
 Dielectric strength - 2000 V
 Standards - IEC 60884-1
 Product certifications - CE
 Ambient air temperature for operation - -5 to 35 A°C
 Ambient air temperature for storage - -5 to 50 A°C
 IK degree of protection - IK04
 IP degree of protection - IP4X
 Environmental characteristic - Acetone
 Liquid soap
 Oil
 Petrol
 UV resistant
 Bleach
 Window-cleaning fluid
 Alcohol
 Packing Units
 Unit Type of Package 1 - PCE
 Number of Units in Package 1 - 1
 Package 1 Height - 6.3 cm
 Package 1 Width - 7.7 cm
 Package 1 Length - 8.6 cm
 Package 1 Weight - 72.9 g
 Unit Type of Package 2 - S03
 Number of Units in Package 2 - 57
 Package 2 Height - 30 cm
 Package 2 Width - 30 cm
 Package 2 Length - 40 cm
 Package 2 Weight - 4.596 kg

Unit Type of Package 3 - P06
Number of Units in Package 3 - 456
Package 3 Height - 77 cm
Package 3 Width - 60 cm
Package 3 Length - 80 cm
Package 3 Weight - 45.27 kg
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/french-priza-new-unica-2pe-16-a-scl-surge-protection-alb-318945>