


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

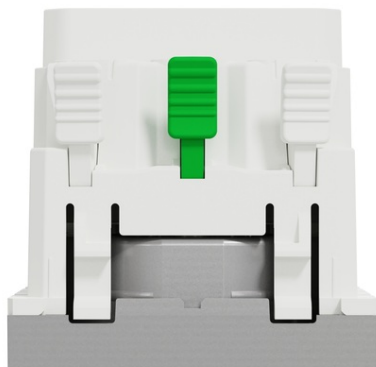

### **SCHNEIDER FRENCH PRIZA, NEW UNICA, 2PE, 16 A , SCL, SURGE PROTECTION, ALUMINIU**

Schneider Electric New Unica socket-outlet NU305930EP is a mechanism in color aluminium. The outlet pole configuration of this socket-outlet is 2P + E with shutters, ensuring safety protection. This device respects the French standard. The dielectric strength of this socket-outlet is 2000V. Its rated current is 16A. The device's fixing mode is clip-in. It is 45 mm in width, 45 mm in height and 38 mm in depth with an embedding depth of 28.7 mm. Its matching mounting box can be recessed into the surface of the wall with flush type. The surface finish is brilliant, gaining extra point for your interior design. The IP rating of this device is IP21D which is very high. It reaches IK04 protection level, which can help protect against impact. Its connection terminals are screwless terminals.. The socket-outlet is made of PC, making it resistant and durable. This socket-outlet is NF certified. Being environmentally friendly, this socket-outlet is a green premium product. This socket-outlet is mercury free New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements.

**Range of product** - New Unica  
**aesthetic name** - New Unica  
**Product or component type** - Socket-outlet  
**device presentation** - Mechanism  
**Outlet poles configuration** - 2P + E with shutters  
**Outlet standard** - French  
**Outlet standard description** - Pin earth  
**Cover plate colour tint** - Aluminium  
**Quantity per set** - 1 box  
**Complementary**  
**Protection type** - Overvoltage protection  
**Rated current** - 16 A at 230 V AC 50/60 Hz  
**Number of modules** - 2 modules  
**Fixing mode** - Clip-in  
**Pilot light** - LED, colour: green and red  
**Connections - terminals** - Screwless terminals  
**Cable cross section** - 4 mm<sup>2</sup> flexible cable  
 0.5-2.5 mm<sup>2</sup> flexible cable  
 4 mm<sup>2</sup> rigid cable  
 0.5-2.5 mm<sup>2</sup> rigid cable  
**Minimum load breaking capacity** - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6  
**Electrical durability** - 10000 cycles, cos phi = 0.8  
**Insulation resistance** - > 5 MΩ at 500 V  
**Material** - PC; mechanism cover  
 PC (polycarbonate) GF10 FR: casing  
**Embedding depth** - 36.7 mm  
**Depth** - 45.45 mm  
**Width** - 45 mm  
**Height** - 45 mm  
**Net weight** - 0.044 kg  
**Environment**  
**Dielectric strength** - 2000 V  
**Standards** - IEC 60884-1  
**Product certifications** - CE  
**Ambient air temperature for operation** - -5 to 35 A°C  
**Ambient air temperature for storage** - -5 to 50 A°C  
**IK degree of protection** - IK04  
**IP degree of protection** - IP4X  
**Environmental characteristic** - Petrol  
 Window-cleaning fluid  
 Liquid soap  
 Bleach  
 Alcohol  
 Acetone  
 Oil  
 UV resistant  
**Packing Units**  
**Unit Type of Package 1** - PCE  
**Number of Units in Package 1** - 1  
**Package 1 Height** - 6.3 cm  
**Package 1 Width** - 7.7 cm  
**Package 1 Length** - 8.6 cm  
**Package 1 Weight** - 72.9 g  
**Unit Type of Package 2** - S01  
**Number of Units in Package 2** - 9  
**Package 2 Height** - 15 cm  
**Package 2 Width** - 15 cm  
**Package 2 Length** - 40 cm  
**Package 2 Weight** - 856.1 g  
**Unit Type of Package 3** - P06

Number of Units in Package 3 - 288  
Package 3 Height - 77 cm  
Package 3 Width - 60 cm  
Package 3 Length - 80 cm  
Package 3 Weight - 35.895 kg  
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/french-priza-new-unica-2pe-16-a-scl-surge-protection-aluminiu-318947>