


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

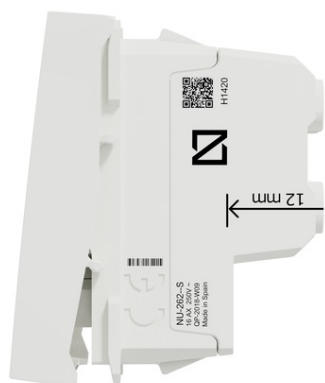

SCHNEIDER INTRERUPATOR, NEW UNICA, MECANISM, 2-POLE 1-WAY, 16AX, 2 MODULE, SCREW TERMINALS, IP4X, ALB

Schneider Electric New Unica switch NU326218S is a mechanism in color white. This is a 2-pole 1-way switch. The fixing mode of this device is clip-in. Its rated current is 16AX. It is 45 mm in width, 45 mm in height and 37.75 mm in depth with an embedding depth of 24.65 mm. The surface finish is glossy, delivering an elegant and high-end feeling to a room. The IP rating of this device is IP21D which is very high. Its connection terminals are screw terminals. The switch is made of Cu.Zn5 Ag, PC (polycarbonate) GF10 FR, thermoplastic ABS-UV stabilized, making it resistant and durable. This switch is AENOR, CE, EAC, NF certified. Being environmentally friendly, this switch is a green premium product. This switch is mercury free and heavy metal free, which takes care of the environment and your health as always. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range of product - New Unica
 Product or component type - Switch
 device presentation - Mechanism
 Technology type - Electromechanical
 Switch function - 2-pole 1-way
 Number of rocker - 1
 Device application - Light control
 Colour tint - White (RAL 9003)
 Type of packing - Flow-pack
 Complementary
 Rated current - 16 AX
 [Ue] rated operational voltage - 250 V
 Network type - AC
 Network frequency - 50/60 Hz
 Electrical durability - 20000 cycles, cos phi = 0.6
 Insulation resistance - > 5 MOhm at 500 V
 Dielectric strength - 2000 V
 Minimum load breaking capacity - 200 operations 1.25 In and 1.1 Un, cos phi = 0.3
 Opening distance - > 3 mm
 Actuator - Rocker
 Number of modules - 2 modules
 Pilot light - LED, colour: red, current consumption: 1.5 mA
 Connections - terminals - Screw terminals
 Cable cross section - 0.5-1.5 mm² rigid cable
 0.5-1.5 mm² flexible cable
 Material - CuZn5 Ag: terminals
 Thermoplastic ABS-UV stabilised: mechanism rocker
 PC (polycarbonate) GF10 FR: casing
 Marking - 0 - 1
 Surface finish - Glossy
 Fixing mode - Clip-in
 Width - 45 mm
 Height - 45 mm
 Depth - 37.75 mm
 Embedding depth - 24.65 mm
 Net weight - 0.0248 kg
 Ambient air temperature for operation - -5 to 40 A°C
 Ambient air temperature for storage - -5 to 50 A°C
 Standards - LV directive
 IEC 60669-1
 Product certifications - CE
 AENOR
 EAC
 NF
 VDE
 Resistance to chemical agents - Resistant to alcohol (70 %)
 Resistant to alcohol (96 %)
 Resistant to A-Lactic Acid
 Resistant to diluted quaternary ammonium
 Resistant to diluted bleach
 Resistant to diluted ammonia
 Resistant to soapy water
 Resistant to crystal cleaner
 Resistant to hydrogen peroxide 10 volumes
 Resistant to hexane
 Environment
 IP degree of protection - IP4X
 IK degree of protection - IK04
 Environmental characteristic - Oil
 UV resistant
 Acetone
 Liquid soap
 Window-cleaning fluid

Petrol
Alcohol
Bleach
Packing Units
Unit Type of Package 1 - PCE
Number of Units in Package 1 - 1
Package 1 Height - 3.5 cm
Package 1 Width - 4.5 cm
Package 1 Length - 4.5 cm
Package 1 Weight - 27.0 g
Unit Type of Package 2 - BB1
Number of Units in Package 2 - 10
Package 2 Height - 8.0 cm
Package 2 Width - 18.0 cm
Package 2 Length - 18.5 cm
Package 2 Weight - 355.0 g
Unit Type of Package 3 - S02
Number of Units in Package 3 - 20
Package 3 Height - 15.0 cm
Package 3 Width - 30.0 cm
Package 3 Length - 40.0 cm
Package 3 Weight - 1.015 kg
Pret: 44,17 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/intrerupator-new-unica-mecanism-2-pole-1-way-16ax-2-module-screw-terminals-ip4x-alb-319011>