


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

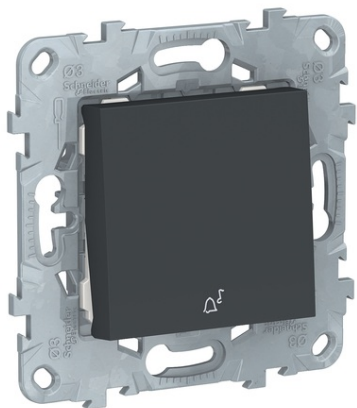

**SCHNEIDER PUSH-BUTTON, NEW UNICA, 10A, 2 MODULE,
 TERMINAL FARA SURUBURI, VOPSIT, IP4X, ANTRACIT**

Schneider Electric New Unica push-button switch NU520654CD is a mechanism with zamak fixing frame in color anthracite. The connection terminals of this push-button switch are screwless terminals. Being made of Cu. Zn37, PBT (polybutylene terephthalate) GF30, PC (polycarbonate) GF10 FR, thermoplastic ABS-UV stabilised, zamak material, this push-button switch is quite reliable and resistant. It is 70.9 mm in width, 70.9 mm in height, 34.25 mm in depth, with an embedding depth of 21.15 mm, and the product weighs 0.0586 kg. Besides it is halogen free, which is good for your health. It is with pilot light without LED. Its fixing mode is screws or claws. This product is sold in 10. What's more, it well satisfied the standard of IEC 60669-1, LV directive, Ro. HS compliant. It obtained AENOR, CE, EAC, NF certificate as well. Also, being environment-friendly, this device reached UV resistant, acetone, alcohol, ammonia, bleach, liquid soap, oil, petrol, window-cleaning fluid. The dielectric strength, a measure of the electrical strength of a material as an insulator, is 2000 V. And its rated current is 10A. Its surface finish is painted powder coated.

Range of product - New Unica

Product or component type - Push-button
 device presentation - Mechanism with fixing frame

Technology type - Electromechanical

Number of rocker - 1

Device application - Light control

Provided equipment - Fixing frame

Colour tint - Anthracite (RAL 7021)

Type of packing - Flow-pack

Complementary

Rated current - 10 A

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Electrical durability - 20000 cycles, cos phi = 0.6

Insulation resistance - > 5 MOhm at 500 V

Dielectric strength - 2000 V

Minimum load breaking capacity - 200 operations 1.25 In and 1.1 Un, cos phi = 0.3

Opening distance - > 3 mm

Actuator - Rocker

Number of modules - 2 modules

Connections - terminals - Screwless terminals

Cable cross section - 0.5-2.5 mm² rigid cable

0.5-2.5 mm² flexible cable

Material - Zamak: fixing frame

Thermoplastic ABS-UV stabilised: mechanism rocker

PC (polycarbonate) GF10 FR: casing

CuZn37: terminals

PBT (polybutylene terephthalate) GF30: release button

Marking - Without marking

Surface finish - Glossy

specific treatment - integrated within the material - Painted

Fixing mode - Screws or claws

Width - 70.9 mm

Height - 70.9 mm

Depth - 34.25 mm

Embedding depth - 21.15 mm

Net weight - 0.0586 kg

Ambient air temperature for operation - -5 to +40 A°C

Ambient air temperature for storage - -5 to +50 A°C

Standards - IEC 60669-1

LV directive

Product certifications - CE

AENOR

EAC

NF

VDE

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

IP degree of protection - IP4X

IK degree of protection - IK04

Environmental characteristic - Oil

UV resistant

Acetone
Liquid soap
Window-cleaning fluid
Petrol
Alcohol
Bleach

Packing Units

Unit Type of Package 1 - PCE
Number of Units in Package 1 - 1
Package 1 Height - 3.5 cm
Package 1 Width - 3.5 cm
Package 1 Length - 3.5 cm
Package 1 Weight - 57 g
Unit Type of Package 2 - BB1
Number of Units in Package 2 - 5
Package 2 Height - 10.3 cm
Package 2 Width - 13.7 cm
Package 2 Length - 19.3 cm
Package 2 Weight - 341 g
Unit Type of Package 3 - S02
Number of Units in Package 3 - 20
Package 3 Height - 15 cm
Package 3 Width - 30 cm
Package 3 Length - 40 cm
Package 3 Weight - 1.679 kg
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/push-button-new-unica-10a-2-module-terminal-fara-suruburi-vopsit-ip4x-antracit-319079>