


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

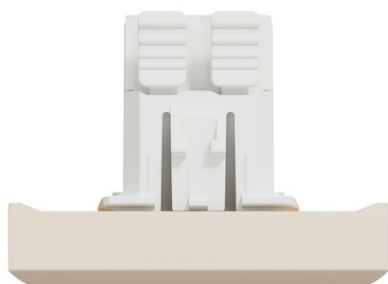

SCHNEIDER BUTON CU REVENIRE, NEW UNICA, LOCATION LAMP, 10 A, 2 MODULE, BEJ

Schneider Electric New Unica switch NU320644N is a mechanism in color beige. This is a push-button location lamp switch. Clip-in this push-button switch for the fixation. Its rated current is 10A. It is 45 mm in width, It is 45 mm in height, 34 mm in depth with an embedding depth of 22 mm. The IP rating of this device is IP20. Its connection terminals are screwless terminals. The switch is made of ASA + PC, making it as resistant as possible. Besides, there is a OFF marking on the surface. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range of product - New Unica
 Product or component type - Push-button
 device presentation - Mechanism
 Technology type - Electromechanical
 Number of rocker - 1
 Device application - Light control
 Provided equipment - LED
 Colour tint - Beige (RAL 1013)
 Type of packing - Flow-pack
 Complementary
 Rated current - 10 A
 [Ue] rated operational voltage - 250 V
 Network type - AC
 Network frequency - 50/60 Hz
 Electrical durability - 40000 cycles, cos phi = 0.6
 20000 cycles, cos phi = 0.6
 Insulation resistance - > 5 MOhm at 500 V
 Dielectric strength - 2000 V
 Minimum load breaking capacity - 200 operations 1.25 In and 1.1 Un, cos phi = 0.3
 Condition of use - Indoor
 Opening distance - > 3 mm
 Actuator - Rocker
 Number of modules - 2 modules
 Pilot light - LED, colour: blue, current consumption: 0.15 mA, temperature rise: 15 A°C
 LED, colour: white, current consumption: 0.05 mA, temperature rise: 15 A°C
 Connections - terminals - Screwless terminals
 Cable cross section - 0.5-2.5 mm² rigid cable
 0.5-2.5 mm² flexible cable
 Material - ASA + PC: mechanism cover
 ABS (acrylonitrile butadiene-styrene): mechanism cover
 Marking - OFF
 Surface finish - Glossy
 specific treatment - integrated within the material - Untreated
 Fixing mode - Clip-in
 Width - 45 mm
 Height - 45 mm
 Depth - 34.25 mm
 Embedding depth - 21.15 mm
 Net weight - 0.0226 kg
 Ambient air temperature for operation - -5 to 40 A°C
 Ambient air temperature for storage - -5 to 50 A°C
 Standards - EN 60669-1
 LV directive
 EMC directive
 Product certifications - CE
 AENOR
 EAC
 NF
 VDE
 Resistance to chemical agents - Resistant to alcohol (70 %)
 Resistant to alcohol (96 %)
 Resistant to A-Lactic Acid
 Resistant to diluted quaternary ammonium
 Resistant to diluted bleach
 Resistant to diluted ammonia
 Resistant to soapy water
 Resistant to crystal cleaner
 Resistant to hydrogen peroxide 10 volumes
 Resistant to hexane
 Environment
 IP degree of protection - IP4X
 IK degree of protection - IK04
 Environmental characteristic - Acetone
 Bleach
 Petrol
 Window-cleaning fluid

Liquid soap
Oil
UV resistant
Alcohol
Packing Units
Unit Type of Package 1 - PCE
Number of Units in Package 1 - 1
Package 1 Height - 3.5 cm
Package 1 Width - 4.5 cm
Package 1 Length - 4.5 cm
Package 1 Weight - 21.0 g
Unit Type of Package 2 - BB1
Number of Units in Package 2 - 10
Package 2 Height - 8.0 cm
Package 2 Width - 18.5 cm
Package 2 Length - 18.5 cm
Package 2 Weight - 298.0 g
Unit Type of Package 3 - S02
Number of Units in Package 3 - 20
Package 3 Height - 15.0 cm
Package 3 Width - 30.0 cm
Package 3 Length - 40.0 cm
Package 3 Weight - 911.0 g
Pret: 34,57 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/buton-cu-revenire-new-unica-location-lamp-10-a-2-module-bej-319120>