


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

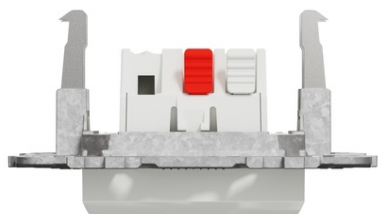

### **SCHNEIDER CAP SCARA, NEW UNICA, 10 A, LED, ALB**

Schneider Electric New Unica switch NU520318NZ is a mechanism with zamak fixing frame + long claws in color white. This is a 1-pole 2-way switch. The device's fixing mode is long claws. Its rated current is 10A. It is 70.9 mm in width, It is 70.9 mm in height, 34 mm in depth with an embedding depth of 22 mm. The IP rating of this device is IP20. This switch has screwless terminals connection terminals. Being made of ASA + PC, zamak material, this skin is reliable and resistant. Besides, there is a OFF marking on the surface. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range of product - New Unica  
 Product or component type - Switch  
 device presentation - Mechanism with fixing frame  
 Technology type - Electromechanical  
 Switch function - 1-pole 2-way  
 Number of rocker - 2  
 Device application - Light control  
 Provided equipment - LED  
 Colour tint - White (RAL 9003)  
 Type of packing - Flow-pack  
 Complementary  
 Rated current - 10 A  
 10 AX  
 [Ue] rated operational voltage - 250 V  
 250 V  
 Network type - AC  
 AC  
 Network frequency - 50/60 Hz  
 50/60 Hz  
 Electrical durability - 10000 cycles  
 20000 cycles, cos phi = 0.6  
 Insulation resistance - > 5 MOhm at 500 V  
 Dielectric strength - 2000 V  
 Minimum load breaking capacity - 200 operations 1.25 In and 1.1 Un, cos phi = 0.3  
 Condition of use - Indoor  
 Opening distance - > 3 mm  
 Actuator - Rocker  
 Number of modules - 2 modules  
 Pilot light - LED, colour: blue, current consumption: 0.15 mA, temperature rise: 15 A°C  
 LED, colour: white, current consumption: 0.05 mA, temperature rise: 15 A°C  
 Connections - terminals - Screwless terminals  
 Cable cross section - 0.5-2.5 mm<sup>2</sup> rigid cable  
 0.5-2.5 mm<sup>2</sup> flexible cable  
 Material - ASA + PC: mechanism cover  
 Zamak: fixing frame  
 Marking - OFF  
 Surface finish - Glossy  
 specific treatment - integrated within the material - Untreated  
 Fixing mode - Long claws  
 Width - 70.9 mm  
 Height - 70.9 mm  
 Depth - 34 mm  
 Embedding depth - 22 mm  
 Net weight - 0.0628 kg  
 Ambient air temperature for operation - -5 to +40 A°C  
 Ambient air temperature for storage - -5 to +50 A°C  
 Standards - EN 60669-1  
 LV directive  
 EMC directive  
 Product certifications - CE  
 AENOR  
 EAC  
 NF  
 VDE  
 Resistance to chemical agents - Resistant to alcohol (70 %)  
 Resistant to alcohol (96 %)  
 Resistant to A-Lactic Acid  
 Resistant to diluted quaternary ammonium  
 Resistant to diluted bleach  
 Resistant to diluted ammonia  
 Resistant to soapy water  
 Resistant to crystal cleaner  
 Resistant to hydrogen peroxide 10 volumes  
 Resistant to hexane  
 Environment  
 IP degree of protection - IP4X  
 IK degree of protection - IK04

Environmental characteristic - Liquid soap  
Bleach  
Petrol  
Oil  
UV resistant  
Acetone  
Alcohol  
Window-cleaning fluid  
Packing Units  
Unit Type of Package 1 - PCE  
Number of Units in Package 1 - 1  
Package 1 Height - 5 cm  
Package 1 Width - 7.5 cm  
Package 1 Length - 7.5 cm  
Package 1 Weight - 65 g  
Unit Type of Package 2 - BB1  
Number of Units in Package 2 - 10  
Package 2 Height - 8.2 cm  
Package 2 Width - 19.7 cm  
Package 2 Length - 22.6 cm  
Package 2 Weight - 755 g  
Unit Type of Package 3 - S03  
Number of Units in Package 3 - 50  
Package 3 Height - 30 cm  
Package 3 Width - 30 cm  
Package 3 Length - 40 cm  
Package 3 Weight - 4.216 kg  
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/cap-scara-new-unica-10-a-led-alb-319138>