


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

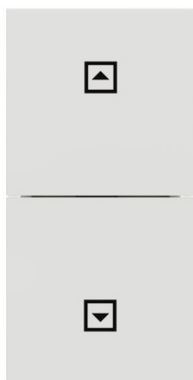

**SCHNEIDER BUTON JALUZELE, NEW UNICA, 10 A, 250 V, AC, 1
 MODULE, ALB**

Schneider Electric New Unica switch NU310718SC is a mechanism in color white. This is a roller blind push-button switch. The fixing mode of this device is clip-in. Its rated current is 10A. It is 22.4 mm in width, It is 45 mm in height, and 33 mm in depth with an embedding depth of 21 mm. The IP rating of this device is IP20. Its connection terminals are screw terminals. The switch is made of ASA + PC, making it resistant and durable. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range - New Unica

Device application - Control

Product or component type - Shutter control

device presentation - Mechanism

Rated current - 10 A

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Fixing mode - Clip-in

Colour tint - White (RAL 9003)

Complementary

device mounting - Flush

Number of modules - 1 module

Technology type - Electromechanical

Actuator - Rocker

Number of rocker - 2

Switch function - 1-pole 2-way

Switch application - Roller blind

Number of poles - 1

Contacts type and composition - 1 C/O

mechanical interlocking - Interlock between up/down

[Iu] rated interrupted current - 2.5 A for motor

Opening distance - > 3 mm

Pilot light - Without LED

Marking - Down

UP

Connections - terminals - Screw terminals

Cable cross section - 2.5 mmA² flexible cable

1.5a€;2.5 mmA² flexible cable

2.5 mmA² rigid cable

1.5a€;2.5 mmA² rigid cable

Minimum load breaking capacity - 200 operations 1.25 In and 1.1 Un, cos phi = 0.3

Electrical durability - 10000 cycles, cos phi = 0.6

Insulation resistance - > 5 MOhm at 500 V

Dielectric strength - 2000 V

Material - ASA + PC: mechanism cover

ABS (acrylonitrile butadiene-styrene): mechanism cover

Standards - LV directive

EN 60669-1

EMC directive

Product certifications - ISI

CE

Ambient air temperature for operation - -5a€;40 A°C

Ambient air temperature for storage - -5a€;40 A°C

Embedding depth - 31.5 mm

Depth - 40.6 mm

Width - 22.5 mm

Height - 45 mm

Net weight - 0.035 kg

Environment

IK degree of protection - IK04

IP degree of protection - IP4X

Environmental characteristic - Window-cleaning fluid

Alcohol

Liquid soap

Bleach

Acetone

Petrol

UV resistant

Oil

Packing Units

Unit Type of Package 1 - PCE

Number of Units in Package 1 - 1

Package 1 Height - 4 cm

Package 1 Width - 4 cm

Package 1 Length - 4.5 cm

Package 1 Weight - 25 g

Unit Type of Package 2 - BB1
Number of Units in Package 2 - 10
Package 2 Height - 6.5 cm
Package 2 Width - 12.5 cm
Package 2 Length - 18.5 cm
Package 2 Weight - 308 g
Unit Type of Package 3 - S03
Number of Units in Package 3 - 160
Package 3 Height - 30 cm
Package 3 Width - 30 cm
Package 3 Length - 40 cm
Package 3 Weight - 5.373 kg
Pret: 38,70 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/buton-jaluzele-new-unica-10-a-250-v-ac-1-module-alb-319149>