


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

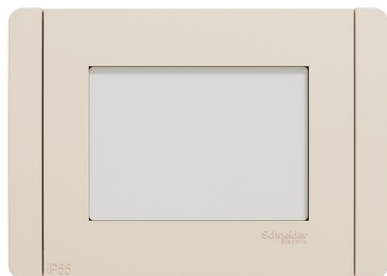

SCHNEIDER PLACA ORNAMENT, UNICA STUDIO, UN MODUL, BEI

New Unica 1-gang cover frame in color beige with 3 modules. The cover frame is made of ASA + PC (polycarbonate), that provides enhanced heat resistance and enhances mechanical properties. By being environment-friendly, this device reached UV resistant, acetone, alcohol, bleach, liquid soap, oil, petrol, window-cleaning fluid. It features protective painted surface treatment. Simple and effective to install, mounting and fitting the cover frame to the device. It well satisfied the standard of EN 60669-1. It is 126 mm in width, It is 90 mm in height, 30 mm in depth. The fixing mode of this device is screws. The IP rating of this device is IP55 which is very high. Besides, it reaches IK01 protection level, which can help protect against impact. This cover frame is SVHC (substances of very high concern) free. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main

Range - New Unica

Device application - Mounting

Product or component type - Cover frame

aesthetic name - Unica Studio

Number of gangs - 1 gang

Installation direction - Horizontal

Type of frame - Single

Number of modules - 3 modules

Fixing mode - Screws

Colour tint - Beige (RAL 1013)

Complementary

Provided equipment - Fixing frame

Material - PC: cover plate

PC: frame-fixing frame

Surface treatment - Untreated

Quantity per set - Set of 5

Standards - IEC 60669-1

IEC 60884-1

Width - 126 mm

Height - 90 mm

Depth - 30 mm

Net weight - 0.095 kg

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

IK degree of protection - IK04

IP degree of protection - IP55

Environmental characteristic - Petrol

Liquid soap

Bleach

UV resistant

Oil

Window-cleaning fluid

Alcohol

Acetone

Packing Units

Unit Type of Package 1 - PCE

Number of Units in Package 1 - 1

Package 1 Height - 3.5 cm

Package 1 Width - 9 cm

Package 1 Length - 12.6 cm

Package 1 Weight - 83 g

Unit Type of Package 2 - BB1

Number of Units in Package 2 - 5

Package 2 Height - 13 cm

Package 2 Width - 12.3 cm

Package 2 Length - 18.5 cm

Package 2 Weight - 517 g

Unit Type of Package 3 - S03

Number of Units in Package 3 - 40

Package 3 Height - 30 cm

Package 3 Width - 30 cm

Package 3 Length - 40 cm

Package 3 Weight - 4.577 kg

Pret: 57,04 lei (TVA inclus)

