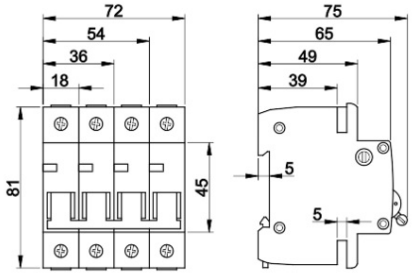


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 <p>The technical drawing shows two views of the TRACON DC circuit breaker. The front view (left) shows a rectangular device with a width of 72 mm and a height of 81 mm. It features four terminal positions, with a central distance of 54 mm between the first two and 36 mm between the last two. The distance from the left edge to the first terminal is 18 mm, and the distance from the last terminal to the right edge is 45 mm. The side view (right) shows a depth of 75 mm. It has a top width of 65 mm and a bottom width of 49 mm. The distance from the left edge to the top terminal is 39 mm, and the distance from the left edge to the bottom terminal is 5 mm. There are two additional terminals on the right side, each 5 mm from the bottom edge.</p>	<p><u>TRACON SIGURANTA AUTOMATA PT.SISTEME FOTOVOLTAICE DC-2C-63 63A, 440V DC</u></p> <p>Tensiunea nominala de izolare: 500 V DC Tensiunea nominala de functionare: 220V, 250V, 440V, 500V Capacitate nominala de inchidere pe scurtcircuit EN 60898-2: 6 kA Capacitate nominala de inchidere pe scurtcircuit EN 60947-2: 10 kA Curent nominal (A): 63 Pret: 212,86 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/siguranta-automata-pt-sisteme-fotovoltaiice-dc-2c-63-63a-440v-dc-64373</p>
---	--