


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

Zeichnung / Drawing

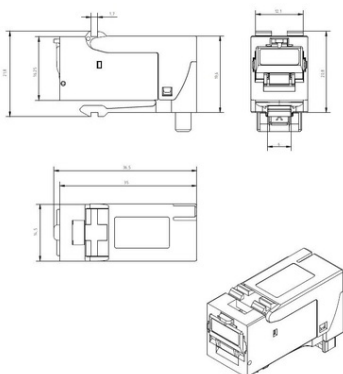

**SCHRACK MODUL RJ45 ECRANAT, CLASA EA 10GB POE+,
PERFORMANCE LINE**

EAN-Code 9004840566444 Lungime 36,50mm Latime neta 14,50mm Inaltime 20,80mm
Masa neta 0,03kg. Temperatura minima a mediului ambiant -40°C Temperatura maxima
a mediului ambiant 70°C Produs Modul conector Ecranaj ecranat Format SCHRACK SFB
Conector standard IEC 60603-7-51 Categorie Cat.6a/10GB Class E_A acc.
to ISO/IEC 11801 Amendment 1/2 typical link length > 2m, in combination with a CP-
cable: CP-Link typ. > 10m 10GbE is supported PoE+ Da Cicluri de conectare %¥ 750
Insertion force %¤ 30N Conductor diameter solid 0,51-0,65mmAWG24/1 - AWG 22/1
Insulation diameter 5 - 9mm Reusable (Module) %¤ 5 cycles with the same diameter
RoHS Conform cu directiva EU 2002/95/EC Housing Zinc diecast Strain-relief sliver Zinc
diecast Surface nickel plated Shield spring Stainless steel PCB FR4 PCB finish HAL lead-
free Material contacte Spring steel Contact finish 0,762 µm / 30 µin Au Insulation
housing PA black (RAL9005) Contact support plate PC yellow (RAL1021) Dust protection
cover PC clear IDC CuNi2Si IDC finish min. 3-6 µm (120-240µin) Sn Particularte ingress
IP2X Water ingress IPX0 Impachetare Bio-degradable Contact resistance %¤ 20m,,
Rezistenta izolatie %¥ 500 M,,
Votage proof - contact-contac %¥ 1000 (DC)V Current
carring capacity at 50°C 1,25A Transfer Impedance @ 1 MHz = %¤ 100m,,
@ 10 MHz = %¤ 200m,,
@ 80 MHz = %¤ 1600m,,
Porturi 1
Pret: 22,90 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/modul-rj45-ecranat-clasa-ea-10gb-poe-performance-line-84080>