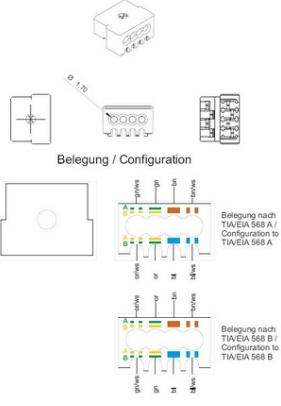


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

<p>Zeichnung / Drawing</p>  <p>Belegung / Configuration</p> <p>Belegung nach TIA/EIA 568 A / Configuration to TIA/EIA 568 A</p> <p>Belegung nach TIA/EIA 568 B / Configuration to TIA/EIA 568 B</p>	<p align="center">SCHRACK SET 24 MODULE RJ45 ECRANAT,CAT.6A,10GB POE+,PERFORMANCE LINE</p> <p>EAN-Code 9004840566437 Lungime 180,00mm Latime neta 75,00mm Inaltime 65,00mm Masa neta 0,74kg. Temperatura minima a mediului ambient -40°C Temperatura maxima a mediului ambient 70°C Produs Modul conector Ecranaj ecranat Format SCHRACK SFB Conector standard IEC 60603-7-51 Categorie Cat.6a/10GB Class E<sub>A</sub> acc. to ISO/IEC 11801 Amendment 1/2 typical link length > 2m, in combination with a CP-cable: CP-Link typ. > 10m 10GbE is supported 4PPoE Da Cicluri de conectare %¥ 750 Insertion force %¤ 30N Conductor diameter solid 0,51-0,65mmAWG24/1 - AWG 22/1 Insulation diameter 5 - 9mm Reusable (Module) %¤ 5 cvyles with the same diameter RoHS Conform cu directiva EU 2002/95/EC Housing Zinc diecast Strain-relief sliver Zinc diecast Surface nickel plated Shield spring Stainless steel PCB FR4 PCB finish HAL lead-free Material contacte Spring steel Contact finish 1,27µm / 50µin Au Insulation housing Light green (RAL6027) Contact support plate PC yellow (RAL1021) Dust protection cover PC clear IDC CuNi2Si IDC finish min. 3-6 µm (120-240µin) Sn Particularte ingress IP2X Water ingress IPX0 Impachetare Bio-degradable Contact resistance %¤ 20m,,! Rezistenta izolatie %¥ 500M,,! Votage proof - contact-contac %¥ 1000 (DC)V Transfer Impedance @ 1 MHz = %¤ 100m,,!@ 10 MHz = %¤ 200m,,!@ 80 MHz = %¤ 1600m,,! Porturi 1 Pret: 627,72 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/set-24-module-rj45-ecranat-cat-6a-10gb-poe-performance-line-84734</p>
--	---