

Corpul din acryl anti UV de 5 mm grosime

Reflector lucios din aluminiu

Sistem de inchidere cu surub si garnitura din elastomer termoplastic.

Suruburi de prindere inoxidabile

Putere: 220-240V, 50-60Hz


Tip Lampa T 8

IP 68 (lampa poate fi scufundata la 2 m adancime)

Rezistenta antivandalism: IK-10

Functionare la temperaturi : -20 - +55 C

Acces

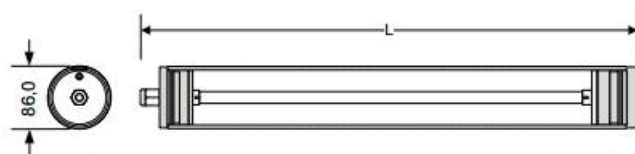

| TR2 T8 1 TUBO / 2 TUBOS | | |
|-------------------------|--------|--------|
| POTENCIA (W) | L (mm) | D (mm) |
| 18 | 709 | 86 |
| 36 | 1319 | 86 |
| 58 | 1624 | 86 |

| TR2 T5 1 TUBO / 2 TUBOS | | |
|-------------------------|--------|--------|
| POTENCIA (W) | L (mm) | D (mm) |
| ALTA EFICACIA | | |
| 14 | 671 | 86 |
| 21 | 966 | 86 |
| 28 | 1272 | 86 |
| 35 | 1574 | 86 |
| ALTO RENDIMIENTO | | |
| 24 | 671 | 86 |
| 39 | 966 | 86 |
| 49 | 1574 | 86 |
| 54 | 1272 | 86 |
| 80 (Sólo 1 tubo) | 1574 | 86 |



Pret: 600,88 LEI (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/corp-de-iluminat-tr2-2-x-18w-709mm-100mm-31188>