


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

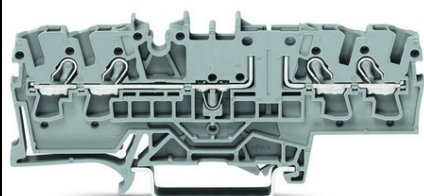

**WAGO 4-CONDUCTOR CARRIER TERMINAL BLOCK; WITH PUSH-BUTTON; FOR DIN-RAIL 35 X 15 AND 35 X 7.5; 2.5 MM<sup>2</sup>; PUSH-IN CAGE CLAMP®; 2,50 MM<sup>2</sup>; GRAY**

Ratings per: IEC/EN 60947-7-1;  
Tensiune nominala (III/3): 400; V  
Tensiune nominala de supratensiune (III/3): 6; kV  
Curent nominal: 16; A  
Legend (ratings): (III / 3) %™ Overvoltage category III / Pollution degree 3;  
Tehnologie conexiune: Push-in CAGE CLAMP®;  
Tip actionare: Push-in; Push-button; Operating tool;  
Connectable conductor materials: Copper;  
Nominal cross-section: 2,5 mm<sup>2</sup>;  
Solid conductor: 0,25 ... 4 mm<sup>2</sup> / 22 ... 12 AWG;  
Solid conductor; push-in termination: 0,75 ... 4 mm<sup>2</sup> / 18 ... 12 AWG;  
Fine-stranded conductor: 0,25 ... 4 mm<sup>2</sup> / 22 ... 12 AWG;  
Fine-stranded conductor; with insulated ferrule: 1 ... 2,5 mm<sup>2</sup> / 18 ... 12 AWG;  
Fine-stranded conductor; with ferrule; push-in termination: 1 ... 2,5 mm<sup>2</sup> / 18 ... 12 AWG;  
Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch;  
Numar total de conexiuni: 4;  
Total number of potentials: 2;  
Numar nivele: 1;  
Wiring type: Front-entry wiring;  
Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.;  
Number of jumper slots: 2;  
Latime: 5,2 mm / 0.205 inch;  
Inaltime from upper-edge of DIN-rail: 32,9 mm / 1.295 inch;  
Adancime: 87,5 mm / 3.445 inch;  
Design: horizontal;  
Tip montaj: DIN-35 rail;  
Marking level: Center/side marking;  
Culoare: gray;  
Material izolator: Polyamide 66 (PA 66);  
Greutate: 9,8; g  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4055143897716;  
Customs tariff number: 85369010000;  
Pret: 20,42 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/4-conductor-carrier-terminal-block-with-push-button-for-din-rail-35-x-15-and-35-x-7-5-2-5-mm2-push-in-cage-clamp-2-50-mm2-gray-149791>