


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

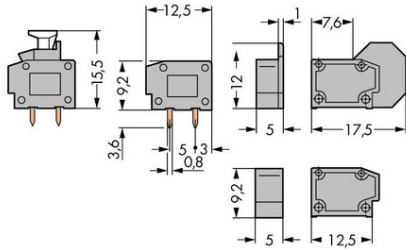

**WAGO STACKABLE PCB TERMINAL BLOCK; PUSH-BUTTON; 1.5
MM²; PIN SPACING 5/5.08 MM; 1-POLE; PUSH-IN CAGE CLAMP®;
1.50 MM²; GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 250; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 400; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 10; A
Legend (ratings): (III / 2) $\hat{a}\%$ ™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 10; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 15; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Push-button;
Solid conductor: 0,2 ... 1,5 mm² / 20 ... 14 AWG;
Fine-stranded conductor: 0,75 ... 1,5 mm² / 20 ... 14 AWG;
Fine-stranded conductor; with insulated ferrule: 0,25 ... 1 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 1 mm²;
Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;
Conductor connection direction to PCB: 0; °
Numar poli: 1;
Numar total de conexiuni: 1;
Total number of potentials: 1;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 5/5,08 mm / 0.197/0.2 inch;
Latime: 6,5 mm / 0.256 inch;
Inaltime: 19,1 mm / 0.752 inch;
Inaltime de la fata: 15,5 mm / 0.61 inch;
Adancime: 12,5 mm / 0.492 inch;
Lungimea pinului de contact: 3,6; mm
Solder pin dimensions: 0,4 x 0,8 mm;
Diametrul de gaurire cu toleranta: 1 (+0,1) mm;
PCB contact: THT;
Solder pin arrangement: within the terminal block (in-line);
Number of solder pins per potential: 2;
Culoare: gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Fire load: 0,014; MJ
Greutate: 0,8; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: CN;
GTIN: 4044918830027;
Customs tariff number: 85369010000;
Pret: 1,43 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/stackable-pcb-terminal-block-push-button-1-5-mm2-pin-spacing-5-5-08-mm-1-pole-push-in-cage-clamp-1-50-mm2-gray-130568>