


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

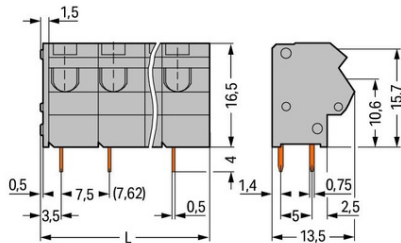

**WAGO 2-CONDUCTOR PCB TERMINAL BLOCK; 0.75 MM<sup>2</sup>; PIN  
SPACING 7.5/7.62 MM; 6-POLE; PUSH WIRE<sup>®</sup>; 0.75 MM<sup>2</sup>; GRAY**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 500; V  
Tensiune nominala de supratensiune (III/3): 6; kV  
Tensiune nominala (III/2): 630; V  
Tensiune nominala de supratensiune (III/2): 6; kV  
Tensiune nominala (II/2): 1000; V  
Tensiune nominala de supratensiune (II/2): 6; kV  
Curent nominal: 10; A  
Legend (ratings): (III / 2) <sup>â%</sup>™ Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 10; A  
Tensiune nominala UL (Use Group D): 300; V  
Curent nominal UL (Use Group D): 10; A  
Certificari: UL 1059;  
Tensiune nominala CSA (Use Group B): 300; V  
Curent nominal CSA (Use Group B): 10; A  
Tensiune nominala CSA (Use Group D): 300; V  
Curent nominal CSA (Use Group D): 10; A  
Tehnologie conexiune: PUSH WIRE<sup>®</sup>;  
Tip actionare: Operating tool;  
Solid conductor: 0.25 ... 0.75 mm<sup>2</sup> / 22 ... 18 AWG;  
Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch;  
Conductor connection direction to PCB: 45; °  
Numar poli: 6;  
Numar total de conexiuni: 12;  
Total number of potentials: 6;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 7.5/7.62 mm / 0.295/0.3 inch;  
Latime: 46.5 mm / 1.831 inch;  
Inaltime: 20.5 mm / 0.807 inch;  
Inaltime de la fata: 16.5 mm / 0.65 inch;  
Adancime: 13.5 mm / 0.531 inch;  
Lungimea pinului de contact: 4; mm  
Solder pin dimensions: 0.5 x 0.75 mm;  
Diametrul de gaurire cu toleranta: 1.1 (+0.1) mm;  
PCB contact: THT;  
Solder pin arrangement: over the entire terminal strip, in line;  
Number of solder pins per potential: 2;  
Culoare: gray;  
Material group: I;  
Material izolator: Polyamide 66 (PA 66);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic(ESu);  
Contact plating: tin-plated;  
Fire load: 0,168; MJ  
Greutate: 8,5; g  
Temperatura lucru: -60 ... +105 °C;  
Product Group: 4 (Printed Circuit);  
Tip ambalare: BOX;  
Tara de origine: PL;  
GTIN: 4044918941679;  
Customs tariff number: 85369010000;  
Pret: 9,79 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-pcb-terminal-block-0-75-mm2-pin-spacing-7-5-7-62-mm-6-pole-push-wire-0-75-mm2-gray-133412>