


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

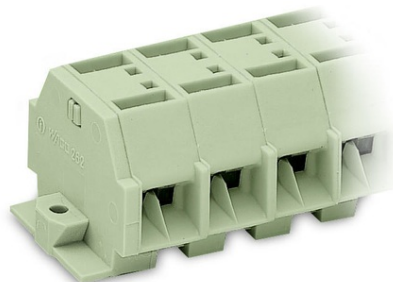

WAGO 4-CONDUCTOR TERMINAL STRIP; SUITABLE FOR EX E II APPLICATIONS; 9-POLE; WITHOUT PUSH-BUTTONS; WITH FIXING FLANGES; FOR SCREW OR SIMILAR MOUNTING TYPES; FIXING HOLE 3.2 MM $\tilde{}$; 4 MM $\hat{}$; CAGE CLAMP $\hat{}$; 4,00 MM $\hat{}$; LIGHT GRAY

Tensiune nominala EN (Ex e II): 550; V
Curent nominal (Ex e II): 30; A
Tehnologie conexiune: CAGE CLAMP $\hat{}$;
Tip actionare: Operating tool;
Connectable conductor materials: Copper;
Solid conductor: 0.5 ... 4 mm 2 / 20 ... 12 AWG;
Fine-stranded conductor: 0.5 ... 4 mm 2 / 20 ... 12 AWG;
Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;
Numar poli: 9;
Numar total de conexiuni: 36;
Total number of potentials: 9;
Numar nivele: 1;
Wiring type: Side-entry wiring;
Latime: 122.5 mm / 4.823 inch;
Inaltime de la fata: 23 mm / 0.906 inch;
Adancime: 33.5 mm / 1.319 inch;
Module Latime: 12 mm / 0.472 inch;
Design: horizontal;
Tip montaj: Mounting flange;
Marking level: Side marking;
Culoare: light gray;
Fire load: 1,055; MJ
Greutate: 65,8; g
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4044918639095;
Customs tariff number: 85369010000;
Pret: 58,61 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/4-conductor-terminal-strip-suitable-for-ex-e-ii-applications-9-pole-without-push-buttons-with-fixing-flanges-for-screw-or-similar-mounting-types-fixing-hole-3-2-mm-oe-4-mm2-cage-clamp-4-00-mm2-light-gray-135974>