


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

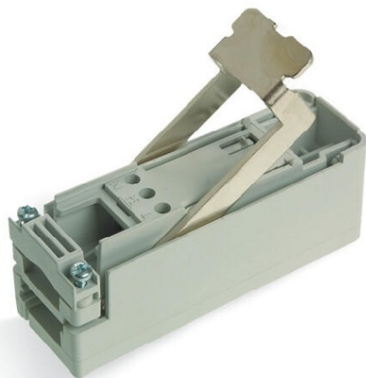

**WAGO TAP-OFF MODULE; FOR FLAT CABLE; 3 X 2.5 MM²; 3-POLE;
GRAY**

Note on Contact Resistance: approx. 1 mΩ; | of contact resistanceâ€© approx. 0.25 mΩ; |
contact transition plug/socket;
Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Curent nominal: 24; A
Legend (ratings): (III / 3) â‰‰™ Overvoltage category III / Pollution degree 3;
Tehnologie conexiune: Screw-type connection;
Tip actionare: Operating tool;
Numar poli: 3;
Tehnologie conexiune 2: IDC;
Numar total de conexiuni: 3;
Total number of potentials: 3;
Sectiunea transversala a firului: 2,5; mm²
Latime: 30 mm / 1.181 inch;
Inaltime: 34 mm / 1.339 inch;
Adancime: 90 mm / 3.543 inch;
Mating force of a plug-in connection: approx. 30 ... 70 N (depending on pole number);
Retention force of a plug-in connection: When locked: > 80 N;
Unmating force of a plug-in connection: when unlocked: approx. 15 ... 20 N;
Number of mating cycles: î»¿200, without resistive load 100, with resistive load IN = 25
A, tested (4 mm²/AWG 12);
Protection type: IP20;
Note on protection type: Only when mated (these compact connectors are not designed
for use in open, easily accessible areas.);
Suitable: for flat cable 3 x 2.5 mm²;
Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Culoare: gray;
Material izolator: Polyamide 66 (PA 66);
Contact material: Copper or copper alloy (surface-treated);
Fire load: 1,5; MJ
Greutate: 90; g
Processing temperature: -5 ... +40 °C;
Continuous operating temperature: -35 ... +85 °C;
Note on continuous operating temperature: PVC cable for temperatures ≤ 70 °C
(including halogen-free) PVC flat cable for temperatures -15 °C to ≤ 70 °C (including
halogen-free) Insulating parts for temperatures ≤ 105 °C;
Product Group: 20 (WINSTA);
Tip ambalare: BOX;
Tara de origine: CH;
GTIN: 4045454004217;
Customs tariff number: 85369010000;
Pret: 100,53 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/tap-off-module-for-flat-cable-3-x-2-5-mm2-3-pole-gray-140776>