


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

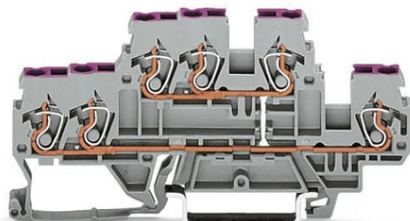

**WAGO 3-CONDUCTOR, DOUBLE-DECK TERMINAL BLOCK; 6-  
CONDUCTOR THROUGH TERMINAL BLOCK; N; SUITABLE FOR EX I  
APPLICATIONS; INTERNAL COMMONING; CONDUCTOR ENTRY WITH  
VIOLET MARKING; FOR DIN-RAIL 35 X 15 AND 35 X 7.5; 2.5 MM<sup>2</sup>;  
CAGE CLAMP®; 2.50 MM<sup>2</sup>; BLUE**

Ratings per: IEC/EN 60947-7-1;  
Tesiune nominala (III/3): 500; V  
Tensiune nominala de supratensiune (III/3): 6; kV  
Curent nominal: 24; A  
Legend (ratings): (III / 3) %<sup>TM</sup> Overvoltage category III / Pollution degree 3;  
Tehnologie conexiune: CAGE CLAMP®;  
Tip actionare: Operating tool;  
Connectable conductor materials: Copper;  
Solid conductor: 0,08 ... 2,5 mm<sup>2</sup> / 28 ... 12 AWG;  
Fine-stranded conductor: 0,08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG;  
Strip length: 6 ... 7 mm / 0.24 ... 0.28 inch;  
Numar total de conexiuni: 6;  
Total number of potentials: 1;  
Numar nivele: 2;  
Wiring type: Front-entry wiring;  
Latime: 5 mm / 0.197 inch;  
Inaltime from upper-edge of DIN-rail: 40 mm / 1.575 inch;  
Adancime: 91 mm / 3.583 inch;  
Design: horizontal type;  
Tip montaj: DIN-35 rail;  
Potential marking: N;  
Marking level: Side marking;  
Culoare: blue;  
Material izolator: Polyamide 66 (PA 66);  
Fire load: 0,205; MJ  
Greutate: 14,4; g  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4045454094546;  
Customs tariff number: 85369010000;  
Pret: 23,56 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/3-conductor-double-deck-terminal-block-6-conductor-through-terminal-block-n-suitable-for-ex-i-applications-internal-commoning-conductor-entry-with-violet-marking-for-din-rail-35-x-15-and-35-x-7-5-2-5-mm2-cage-clamp-2-50-mm2-blue-141361>