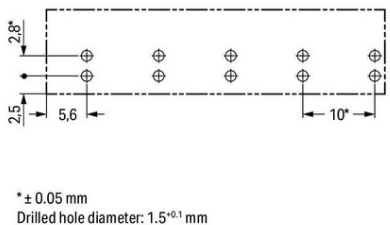


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

 <p>* ± 0.05 mm Drilled hole diameter: 1.5<sup>+0.1</sup> mm</p>	<p align="center"><b>WAGO SOCKET FOR PCBs; STRAIGHT; 5-POLE; COD. B; PINK</b></p> <p>Note on Contact Resistance: approx. 1 mΩ; of contact resistance © approx. 0.25 mΩ; contact transition plug/socket; Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 400; V Tensiune nominala de supratensiune (III/3): 6; kV Curent nominal: 25; A Legend (ratings): (III / 3) % Overvoltage category III / Pollution degree 3; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 23; A Numar poli: 5; Total number of potentials: 5; Numar nivele: 1; Distanta intre pini: 10 mm / 0.394 inch; Latime: 47 mm / 1.85 inch; Inaltime: 29,5 mm / 1.161 inch; Inaltime de la fata: 26 mm / 1.024 inch; Adancime: 14,6 mm / 0.575 inch; Lungimea pinului de contact: 3,5; mm Solder pin dimensions: 1 x 0,8 mm; Diametrul de gaurire cu toleranta: 1,5 (-0,1 ... +0,1) mm; Technologie: SMI; Coding: B; Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number); Retention force of a plug-in connection: Locked: &gt; 80 N; Unmating force of a plug-in connection: Unlocked: approx. 20 ... 70 N (depending on pole number); Number of mating cycles: &gt;200, without resistive load 100, with resistive load IN = 25 A, tested (4 mm<sup>2</sup>/AWG 12); Design: straight; Marking: N L I- I+; Potential marking: N L I- I+; Application: SMI; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCB; Mismating protection: Yes; Mating direction to the PCB: 90; ° Locking of plug-in connection: locking lever; Locking lever: yes; PCB contact: THT; Solder pin arrangement: 2 in-line solder pins/pole; Number of solder pins per potential: 2; Culoare: pink; Material izolator: Polyamide 66 (PA 66); Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Copper or copper alloy (surface-treated); Fire load: 0,192; MJ Greutate: 10,5; g Processing temperature: -5 ... +40 °C; Continuous operating temperature: -35 ... +85 °C; Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C; Tip ambalare: BOX; Tara de origine: PL; GTIN: 4050821553915; Customs tariff number: 85366990990; Pret: 15,35 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialeelectrice.ro/socket-for-pcbs-straight-5-pole-cod-b-pink-141619">https://www.materialeelectrice.ro/socket-for-pcbs-straight-5-pole-cod-b-pink-141619</a></p>
---	--