


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

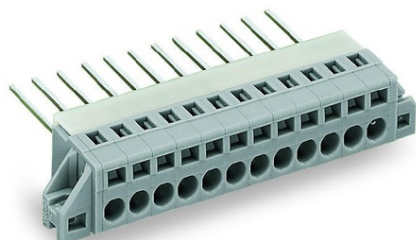

WAGO FEEDTHROUGH TERMINAL BLOCK; PLATE THICKNESS: 1.5 MM; 2.5 MM²; PIN SPACING 5 MM; 8-POLE; CAGE CLAMP[®]; 2,50 MM²; GRAY

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 320; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 5; A
Legend (ratings): (III / 2) $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 5; A
Tensiune nominala UL (Use Group C): 150; V
Curent nominal UL (Use Group C): 5; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 5; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 5; A
Tehnologie conexiune: CAGE CLAMP[®];
Tip actionare: Operating tool;
Solid conductor: 0.08 ... 2.5 mm² / 28 ... 14 AWG;
Fine-stranded conductor: 0.08 ... 2.5 mm² / 28 ... 14 AWG;
Fine-stranded conductor; with insulated ferrule: 0.25 ... 1.5 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 2.5 mm²;
Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;
Numar poli: 8;
Tehnologie conexiune 2: Wire-wrap pin;
Numar total de conexiuni: 8;
Total number of potentials: 8;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 5 mm / 0.197 inch;
Latime: 55.2 mm / 2.173 inch;
Inaltime: 14.3 mm / 0.563 inch;
Adancime: 15.5 mm / 0.61 inch;
Housing sheet thickness: 1.5 ... 1.5 mm / 0.059 ... 0.059 inch;
Tip montaj: Mounting flange;
Tip montaj: Feed-through mounting; Panel mounting;
Culoare: gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Fire load: 0,206; MJ
Greutate: 12,6; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 3 (Multi Conn. System);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4044918269841;
Customs tariff number: 85366990990;
Pret: 72,60 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/feedthrough-terminal-block-plate-thickness-1-5-mm-2-5-mm2-pin-spacing-5-mm-8-pole-cage-clamp-2-50-mm2-gray-142643>