


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

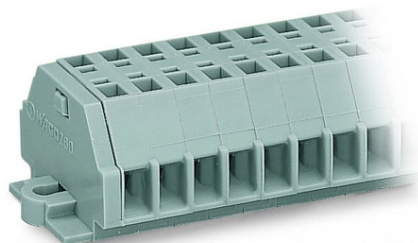

WAGO 2-CONDUCTOR TERMINAL STRIP; 9-POLE; WITHOUT PUSH-BUTTONS; WITH SNAP-IN MOUNTING FEET; FOR PLATE THICKNESS 0.6 - 1.2 MM; FIXING HOLE 3.5 MM $\tilde{\sim}$; 1.5 MM \hat{A} \tilde{A} ; CAGE CLAMP \hat{A} \tilde{A} ; 1,50 MM \hat{A} \tilde{A} ; GRAY

Tesiune nominala (III/3): 400; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 18; A
Legend (ratings): (III / 3) \hat{A} % $\tilde{\sim}$ Overvoltage category III / Pollution degree 3;
Tehnologie conexiune: CAGE CLAMP \hat{A} \tilde{A} ;
Tip actionare: Operating tool;
Connectable conductor materials: Copper;
Solid conductor: 0.08 ... 1.5 mm \hat{A} \tilde{A} / 28 ... 16 AWG;
Fine-stranded conductor: 0.08 ... 1.5 mm \hat{A} \tilde{A} / 28 ... 16 AWG;
Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;
Numar poli: 9;
Numar total de conexiuni: 18;
Total number of potentials: 9;
Numar nivele: 1;
Wiring type: Side-entry wiring;
Latime: 49.4 mm / 1.945 inch;
Inaltime de la fata: 17 mm / 0.669 inch;
Adancime: 25 mm / 0.984 inch;
Module Latime: 5 mm / 0.197 inch;
Design: horizontal;
Tip montaj: Snap-in mounting foot;
Marking level: Side marking;
Culoare: gray;
Fire load: 0,3; MJ
Greutate: 14,9; g
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4044918606967;
Customs tariff number: 85369010000;
Pret: 18,49 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-terminal-strip-9-pole-without-push-buttons-with-snap-in-mounting-feet-for-plate-thickness-0-6-1-2-mm-fixing-hole-3-5-mm-oe-1-5-mm2-cage-clamp-1-50-mm2-gray-144044>