


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

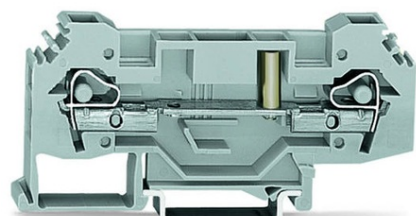

**WAGO 2-CONDUCTOR THROUGH TERMINAL BLOCK; 6 MM<sup>2</sup>; WITH  
TEST OPTION; FOR 4 MM Ø TEST PLUGS; SAME PROFILE AS 2-  
CONDUCTOR DISCONNECT TERMINAL BLOCK; LATERAL MARKER  
SLOTS; FOR DIN-RAIL 35 X 15 AND 35 X 7.5; CAGE CLAMP®; 6,00  
MM<sup>2</sup>; GRAY**

Ratings per: IEC/EN 60947-7-1;  
Tesiune nominala (III/3): 400; V  
Tensiune nominala de supratensiune (III/3): 6; kV  
Curent nominal: 41; A  
Legend (ratings): (III / 3) %<sup>TM</sup> Overvoltage category III / Pollution degree 3;  
Tehnologie conexiune: CAGE CLAMP®;  
Tip actionare: Operating tool;  
Connectable conductor materials: Copper;  
Solid conductor: 0,2 ... 6 mm<sup>2</sup> / 24 ... 10 AWG;  
Fine-stranded conductor: 0,2 ... 6 mm<sup>2</sup> / 24 ... 10 AWG;  
Strip length: 12 ... 13 mm / 0.47 ... 0.51 inch;  
Numar total de conexiuni: 2;  
Total number of potentials: 1;  
Numar nivele: 1;  
Wiring type: Side-entry wiring;  
Latime: 8 mm / 0.315 inch;  
Inaltime from upper-edge of DIN-rail: 37 mm / 1.457 inch;  
Adancime: 87,5 mm / 3.445 inch;  
Design: horizontal type;  
Tip montaj: DIN-35 rail;  
Marking level: Side marking;  
Culoare: gray;  
Material izolator: Polyamide 66 (PA 66);  
Greutate: 19,2; g  
Product Group: 1 (Rail Mounted Terminal Blocks);  
Tip ambalare: BOX;  
Tara de origine: CN;  
GTIN: 4044918673365;  
Customs tariff number: 85369010000;  
Pret: 16,23 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-through-terminal-block-6-mm2-with-test-option-for-4-mm-oe-test-plugs-same-profile-as-2-conductor-disconnect-terminal-block-lateral-marker-slots-for-din-rail-35-x-15-and-35-x-7-5-cage-clamp-6-00-mm2-gray-144173>