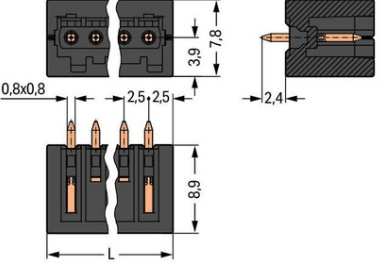


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<p><u>WAGO THR MALE HEADER; 0.8 X 0.8 MM SOLDER PIN; STRAIGHT; 100% PROTECTED AGAINST MISMATING; PIN SPACING 2.5 MM; 7- POLE; BLACK</u></p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 80; V Tensiune nominala de supratensiune (III/3): 2,5; kV Tensiune nominala (III/2): 160; V Tensiune nominala de supratensiune (III/2): 2,5; kV Tensiune nominala (II/2): 320; V Tensiune nominala de supratensiune (II/2): 2,5; kV Curent nominal: 6; A Legend (ratings): (III / 2) %TM Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 150; V Curent nominal UL (Use Group B): 4; A Certificari: UL 1059; Tensiune nominala CSA (Use Group B): 150; V Curent nominal CSA (Use Group B): 4; A Numar poli: 7; Total number of potentials: 7; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 2.5 mm / 0.098 inch; Latime: 20 mm / 0.787 inch; Inaltime: 11.3 mm / 0.445 inch; Inaltime de la fata: 8.9 mm / 0.35 inch; Adancime: 7.8 mm / 0.307 inch; Lungimea pinului de contact: 2,4; mm Solder pin dimensions: 0.8 x 0.8 mm; Diametru placat prin gaura (THR): 1.2 (+0.1) mm; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for PCBs; Mismating protection: Yes; Mating direction to the PCB: 90; ° PCB contact: THR; Solder pin arrangement: over the entire male connector, in line; Number of solder pins per potential: 1; Culoare: black; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Fire load: 0,021; MJ Greutate: 1,1; g Temperatura lucru: -60 ... +100 °C; Product Group: 3 (Multi Conn. System); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4045454676124; Customs tariff number: 85366990990; Pret: 10,57 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/thr-male-header-0-8-x-0-8-mm-solder-pin-straight-100-protected-against-mismating-pin-spacing-2-5-mm-7-pole-black-150554</p>
---	--