


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

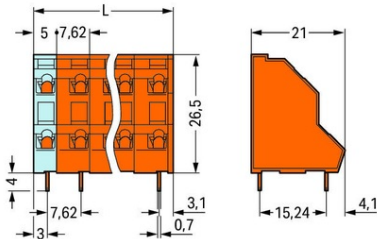

**WAGO DOUBLE-DECK PCB TERMINAL BLOCK; 2.5 MM²; PIN
 SPACING 7.62 MM; 2 X 3-POLE; CAGE CLAMP®; 2.50 MM²;
 ORANGE**

Ratings per: IEC/EN 60664-1;
 Ratings (note): between the modules;
 Tensiune nominala (III/3): 400; V
 Tensiune nominala de supratensiune (III/3): 6; kV
 Tensiune nominala (III/2): 630; V
 Tensiune nominala de supratensiune (III/2): 6; kV
 Tensiune nominala (II/2): 1000; V
 Tensiune nominala de supratensiune (II/2): 6; kV
 Curent nominal: 21; A
 Ratings per: IEC/EN 60664-1;
 Ratings (note) 2: between the decks;
 Tensiune nominala (III/3) 2: 320; V
 Tensiune nominala de supratensiune (III/3) 2: 4; kV
 Tensiune nominala (III/2) 2: 320; V
 Tensiune nominala de supratensiune (III/2) 2: 4; kV
 Tensiune nominala (II/2) 2: 630; V
 Tensiune nominala de supratensiune (II/2) 2: 4; kV
 Curent nominal 2: 21; A
 Legend (ratings): (III / 2) $\hat{=}$ ™ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 10; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 10; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 300; V
 Curent nominal CSA (Use Group B): 10; A
 Tensiune nominala CSA (Use Group D): 300; V
 Curent nominal CSA (Use Group D): 10; A
 Tehnologie conexiune: CAGE CLAMP®;
 Tip actionare: Operating tool;
 Solid conductor: 0,08 ... 2,5 mm² / 28 ... 12 AWG;
 Fine-stranded conductor: 0,08 ... 2,5 mm² / 28 ... 12 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,25 ... 1,5 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 2,5 mm²;
 Strip length: 5 ... 6 mm / 0.2 ... 0.24 inch;
 Conductor connection direction to PCB: 45; °
 Numar poli: 3;
 Numar total de conexiuni: 6;
 Total number of potentials: 6;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 2;
 Note (conductor cross-section): 12 AWG: THHN, THWN;
 Distanta intre pini: 7,62 mm / 0.3 inch;
 Latime: 21,24 mm / 0.836 inch;
 Inaltime: 30,5 mm / 1.201 inch;
 Inaltime de la fata: 26,5 mm / 1.043 inch;
 Adancime: 21 mm / 0.827 inch;
 Lungimea pinului de contact: 4; mm
 Solder pin dimensions: 0,7 x 0,7 mm;
 Diametrul de gaurire cu toleranta: 1,3 (+0,1) mm;
 PCB contact: THT;
 Solder pin arrangement: within the terminal block (in-line);
 Number of solder pins per potential: 1;
 Culoare: orange;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic (ECu);
 Contact plating: tin-plated;
 Fire load: 0,138; MJ
 Greutate: 8; g
 Temperatura lucru: -60 ... +105 °C;
 Product Group: 4 (Printed Circuit);
 Tip ambalare: BOX;
 Tara de origine: PL;
 GTIN: 4044918914673;
 Customs tariff number: 85369010000;
 Pret: 17,54 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/double-deck-pcb-terminal-block-2-5-mm2-pin-spacing-7-62-mm-2-x-3-pole-cage-clamp-2-50-mm2-orange-151192>