


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

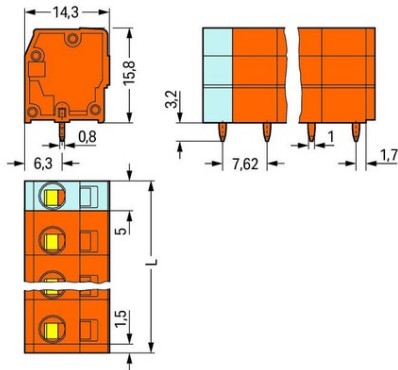

**WAGO PCB TERMINAL BLOCK; 2.5 MM<sup>2</sup>; PIN SPACING 7.62 MM; 10-  
 POLE; CAGE CLAMP®; 2.50 MM<sup>2</sup>; ORANGE**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 500; V  
 Tensiune nominala de supratensiune (III/3): 6; kV  
 Tensiune nominala (III/2): 630; V  
 Tensiune nominala de supratensiune (III/2): 6; kV  
 Tensiune nominala (II/2): 1000; V  
 Tensiune nominala de supratensiune (II/2): 6; kV  
 Curent nominal: 24; A  
 Legend (ratings): (III / 2) %<sup>TM</sup> Overvoltage category III / Pollution degree 2;  
 Tensiune nominala UL (Use Group B): 300; V  
 Curent nominal UL (Use Group B): 20; A  
 Tensiune nominala UL (Use Group D): 300; V  
 Curent nominal UL (Use Group D): 10; A  
 Certificari: UL 1059;  
 Tensiune nominala CSA (Use Group B): 300; V  
 Curent nominal CSA (Use Group B): 8; A  
 Tensiune nominala CSA (Use Group D): 300; V  
 Curent nominal CSA (Use Group D): 8; A  
 Tehnologie conexiune: CAGE CLAMP®;  
 Tip actionare: Operating tool;  
 Solid conductor: 0,08 ... 2,5 mm<sup>2</sup> / 28 ... 12 AWG;  
 Fine-stranded conductor: 0,08 ... 2,5 mm<sup>2</sup> / 28 ... 12 AWG;  
 Fine-stranded conductor; with insulated ferrule: 0,25 ... 1,5 mm<sup>2</sup>;  
 Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 2,5 mm<sup>2</sup>;  
 Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;  
 Conductor connection direction to PCB: 90; °  
 Numar poli: 10;  
 Numar total de conexiuni: 10;  
 Total number of potentials: 10;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 1;  
 Note (conductor cross-section): 12 AWG: THHN, THWN;  
 Distanta intre pini: 7,62 mm / 0.3 inch;  
 Latime: 75,08 mm / 2.956 inch;  
 Inaltime: 19 mm / 0.748 inch;  
 Inaltime de la fata: 15,8 mm / 0.622 inch;  
 Adancime: 14,3 mm / 0.563 inch;  
 Lungimea pinului de contact: 3,2; mm  
 Solder pin dimensions: 0,8 x 1,2 mm;  
 Diametrul de gaurire cu toleranta: 1,6 (+0,1) mm;  
 PCB contact: THT;  
 Solder pin arrangement: over the entire terminal strip (in-line);  
 Number of solder pins per potential: 1;  
 Culoare: orange;  
 Material group: I;  
 Material izolator: Polyamide 66 (PA 66);  
 Flammability class per UL94: V0;  
 Clamping spring material: Chrome nickel spring steel (CrNi);  
 Contact material: Cupru electrolitic (ECu);  
 Contact plating: tin-plated;  
 Fire load: 0,27; MJ  
 Greutate: 14,3; g  
 Temperatura lucru: -60 ... +105 °C;  
 Product Group: 4 (Printed Circuit);  
 Tip ambalare: BOX;  
 Tara de origine: CH;  
 GTIN: 4044918861205;  
 Customs tariff number: 85369010000;  
 Pret: 21,65 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-2-5-mm2-pin-spacing-7-62-mm-10-pole-cage-clamp-2-50-mm2-orange-151751>