


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

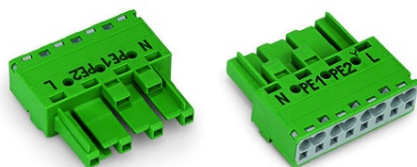

### WAGO SOCKET; 4-POLE; COD. Q; 4,00 MM<sup>2</sup>; GREEN

Note on Contact Resistance: approx. 1 m $\Omega$ , of contact resistance $\text{\textcircled{C}}$  approx. 0.25 m $\Omega$ ,  
contact transition plug/socket;  
Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 400; V  
Tensiune nominala de supratensiune (III/3): 6; kV  
Curent nominal: 32; A  
Legend (ratings): (III / 3)  $\hat{\text{a}}$ %<sup>TM</sup> Overvoltage category III / Pollution degree 3;  
Tensiune nominala UL 1977: 600; V  
Curent nominal UL 1977: 23; A  
Tehnologie conexiune: Push-in CAGE CLAMP $\text{\textcircled{R}}$ ;  
Tip actionare: Operating tool; Push-in;  
Nominal cross-section: 4 mm<sup>2</sup>;  
Solid conductor: 0,5 ... 4 mm<sup>2</sup> / 20 ... 12 AWG;  
Solid conductor; push-in termination: 1,5 ... 4 mm<sup>2</sup> / 16 ... 12 AWG;  
Stranded conductor: 0,5 ... 2,5 mm<sup>2</sup> / 20 ... 14 AWG;  
Fine-stranded conductor: 0,5 ... 4 mm<sup>2</sup> / 20 ... 12 AWG;  
Fine-stranded conductor; with insulated ferrule: 0,25 ... 1,5 mm<sup>2</sup> / 20 ... 16 AWG;  
Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 2,5 mm<sup>2</sup> / 20 ... 14 AWG;  
Fine-stranded conductor; with ferrule; push-in termination: 1,5 mm<sup>2</sup> / 16 AWG;  
Strip length: 9 mm / 0.35 inch;  
Note (strip length): see also packaging or instructions;  
Numar poli: 4;  
Numar total de conexiuni: 4;  
Total number of potentials: 4;  
Conductor entry direction to mating direction: 0;  $\text{\textcircled{O}}$   
Distanta intre pini: 10 mm / 0.394 inch;  
Latime: 40 mm / 1.575 inch;  
Inaltime: 12,9 mm / 0.508 inch;  
Adancime: 37,5 mm / 1.476 inch;  
Coding: Q;  
Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number);  
Retention force of a plug-in connection: Locked: > 80 N;  
Unmating force of a plug-in connection: Unlocked: approx. 20 ... 70 N (depending on  
pole number);  
Number of mating cycles:  $\text{\textcircled{I}}$   $\text{\textcircled{Z}}$  200, without resistive load 100, with resistive load IN = 25  
A, tested (4 mm<sup>2</sup>/AWG 12);  
Marking: N PE1 PE2 L;  
Protection type: IP20;  
Note on protection type: In mated condition with strain relief housing: IP2xC (These  
compact connectors are not designed for use in open, easily accessible areas.);  
Potential marking: N PE1 PE2 L;  
Application: for "Clean Ground" applications;  
Tip contact (pluggable connector): Conector mama/priza;  
Connector (connection type): for conductor;  
Mismatching protection: Yes;  
Locking of plug-in connection: locking lever;  
Locking lever: retrofittable;  
Culoare: green;  
Material izolator: Polyamide 66 (PA 66);  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Copper or copper alloy (surface-treated);  
Fire load: 0,211; MJ  
Greutate: 12,6; g  
Processing temperature: -5 ... +40  $\text{\textcircled{C}}$ ;  
Continuous operating temperature: -35 ... +85  $\text{\textcircled{C}}$ ;  
Note on continuous operating temperature: Insulating parts for temperatures  $\leq$  105  $\text{\textcircled{C}}$ ;  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4045454299156;  
Customs tariff number: 85366990990;  
Pret: 18,92 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/socket-4-pole-cod-q-4-00-mm2-green-151935>