


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

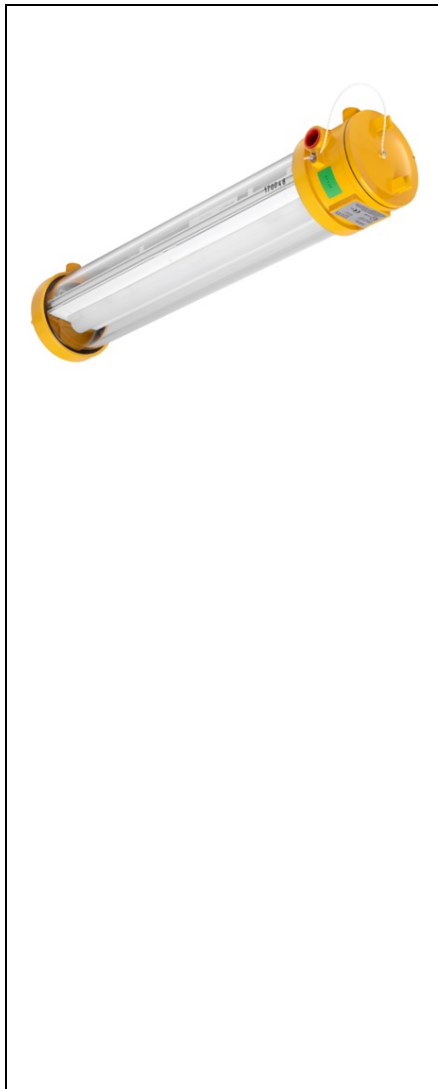

**ZALUX LAMPA CILINDRICA PENTRU ILUMINARE ZONE EX , LAMPA  
ATEX KRATEX HE 0.6 20-840 ETDD CS GLASS**

Connected lighting with a wide range of options for ATEX projects  
Suitable for the hottest environments up to 55°C, even outdoors.  
Compliant with gas groups IIA, IIB, IIC, due to its reduced MESH, making it perfect for almost all ATEX environments.  
DALI dimmable optional to optimize the use of the light and save energy.  
Intelligent wireless control optional.

Downloads  
Zone 1, 21  
Ex II 2G Ex db IIC T6 Gb  
Ex II 2D Ex tb IIIC T85 Db

Features  
Mechanical  
Profile Borosilicate glass  
End caps Aluminium alloy, yellow RAL 1003  
Gasket NBR  
Cable entry 2 entries of 3/4 NPT for cable gland (not included)

Operational Data  
Light colour 4,000 K  
CRI >80  
Luminous flux 2,650 lm  
Power 20 W  
Efficiency 135 lm/W

Functional  
Lifetime L80 50,000 h at 25°C  
Fire protection PC / Flammability (UL94): V2  
Glow wire test (EN 60695-2-11): 850°C

Electrical  
Driver DALI Casambi dimmable  
Connection 5 pole push wire terminal block  
Flicker factor 5%  
Power factor > 0.95 full load

Photometrical  
Colour consistency < 3 SDCM

Dimensions  
Length (X) 750 mm  
Distance between springs (Xm) 640 mm  
Width (Y) 157 mm  
Height (Z) 197 mm  
Weight 6.3 kg

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/lampa-cilindrica-pentru-iluminare-zone-ex-lampa-atex-kratex-he-0-6-20-840-etdd-cs-glass-287685>