


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

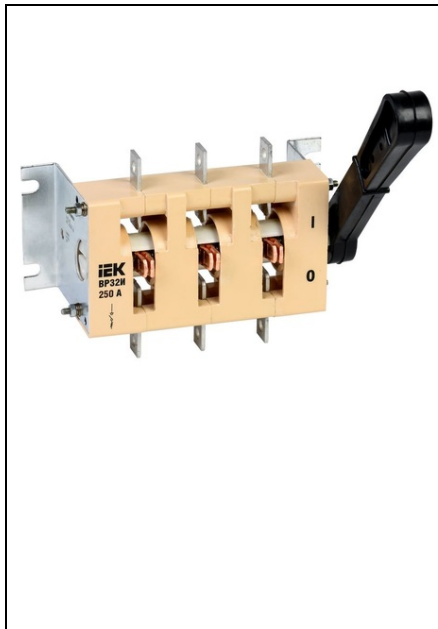

IEK SEPARATOR VR32I-35A30220 250A

VR32I switch disconnectors are intended for non-automated commutation of AC circuits with rated voltage up to 690 V (50 Hz). Used for installation in low-voltage complete devices such as lead-in distribution units of residential, public and industrial buildings, distribution boards and panels, control panels and boxes, etc. VR32I switch disconnectors meet the requirements EN 60947-3. Convenient mounting and exploitation.

Low power losses at the expense of using contemporary materials.

Double visible circuit breaking, color indication of "on" position provide for boosting the safety of electric installations servicing by technical personnel.

Possibility to connect copper and aluminum current conducting wires as well as copper and aluminum buses. Rated permanent current Iu: 250

Max. rated operation voltage Ue AC: 690

Conditioned rated short-circuit current Iq: 14000

Number of poles: 3

Device construction: EV009211

Type of control element: EV004094

Connection type main current circuit: EV008864

Degree of protection (IP), front side: EV006404

Rated insulation voltage Ui: 690

Rated surge voltage invariability: 8

Max. cross section incoming cable: 70-150

Heat loss: 15

Pret: 233,69 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/separator-vr32i-35a30220-250a-307790>