


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

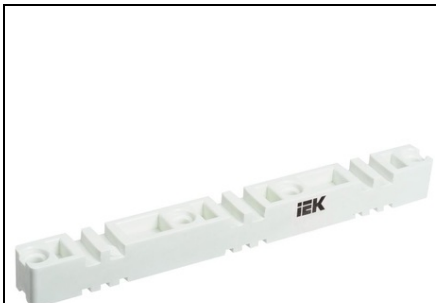

IEK IZOLATOR FLAT BUSBAR ISP 3P PENTRU BUS BARS 5 SI 10 MM 370 MM

Designed for fastening and insulation of power bus-bars in electrical switchboards and switchboards with a rated current of 250 to 4000A. Used to organize tire assemblies and install various branches from the central tires when assembling switchboards for switchgear for various purposes. The insulator has a 2-or 3-phase design and provides mounting tires with a thickness of 5 and 10 mm. Made of SMC material. Convenient and fast installation of cable routes.

The high strength of the SMC insulator material guarantees resistance to dynamic loads in the event of short-circuit currents.

Universal insulator provides the possibility of using from 1 to 3 copper or aluminum tires with a thickness of 5 to 10 mm for currents from 250 to 4000 A.

A wide range of insulators connecting studs allows the use of tires up to 120 mm thick. Number of poles: 3

Busbar distance: 125

Nominal rated voltage: 400

Ambient temperature: -40...+60

Short-term withstand voltage of industrial frequency: 8.0

Bending strength: 123

Diameter of holes for fastening screws in buses: 12.0

Height: 35.0

Depth: 35.0

Colour: EV000202

Material: IEK_V0000495

Busbar thickness: 5 \varnothing , 10

Toughness: ≥ 25

Flammability category in accordance with GOST 28157: IEK_V0000493

Max. rated current: 3300

Pret: 92,16 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/izolator-flat-busbar-isp-3p-pentru-bus-bars-5-si-10-mm-370-mm-308958>