


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

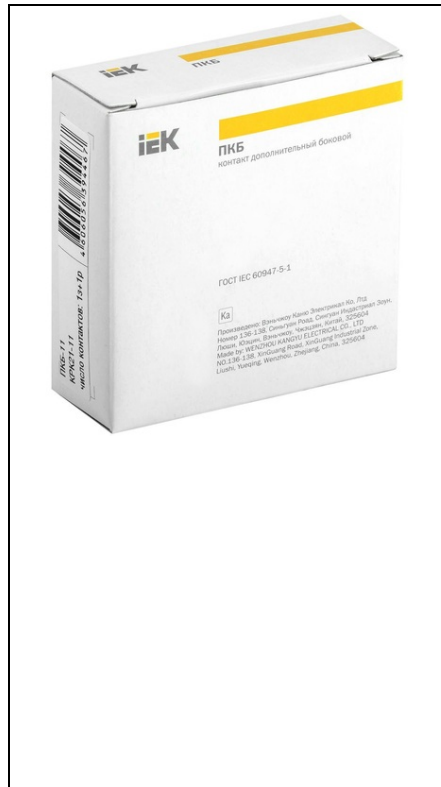

### **IEK SIDE AUXILLARY CONTACT KPK21-11 1NO+1NC**

PKB contact devices are intended for expanding the possibilities of contactor application within technology project automation systems. High response speed.

Reliable fastening.

Simplicity of design.

Wide range. Type of set-up: EV003970

Contact design:  $\text{D}\check{\text{S}}\text{D}\check{\text{C}}\check{\text{E}}\check{\text{D}}\sim, \text{D}\check{\text{S}}\text{D}\check{\text{C}}\check{\text{E}}\check{\text{D}}\sim\text{D}\mu \text{D}^3\text{D}^{\circ}\text{D}\pm\text{D}^{\circ}\check{\text{N}}\check{\text{E}}\text{D}, \check{\text{N}}, \text{D}^{\circ} 1...3$

Voltage type for actuating: EV000509

Rated operation current  $I_e$  at AC-15, 230 V: 6.0

Rated operation current  $I_e$  at DC-13, 230 V: 1.5

Rated control supply voltage  $U_s$  at AC 50HZ: 660

Rated control supply voltage  $U_s$  at DC: 440

Number of contacts as normally closed contact: 1

Number of contacts as normally open contact: 1

Min on capability at min current: 5.0

Min on capability at min voltage: 17.0

Max short-term load: 100.0

Thermal resistance current: 10.0

Insulation resistance: 10.0

Rated insulation voltage  $U_i$ : 690

Max. conductor cross section: 1...4

Operating temperature range: -40...+50

Maintainability: EV000494

Nominal operating DC DC-13 400 V: 0.63

Nominal operating current  $I_e$  at AC-15 660 V: 1.50

Nominal operating current  $I_e$  at AC-15 400 V: 3.00

Width: 17.0

Height: 73.0

Depth: 72.0

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/side-auxillary-contact-kpk21-11-1no-1nc-311849>