


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

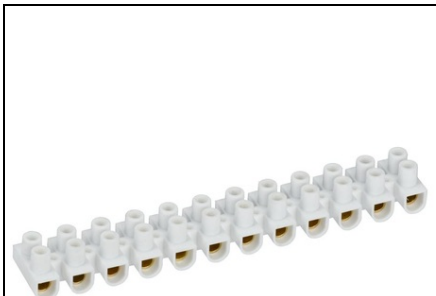

IEK CLEME SIR ZVI-30 6-16MM2 12STEAM

Applied for screw connection of conductors, protecting wires from damage and excluding possibility of short circuit to the frame of electric unit. Insulation frame is made of white non-flammable polystyrene or transparent polyethylene. Terminal block and screws - latten alloy. Protection of the wire from damage and exclusion of the possibility of a short circuit to the housing of the electrical installation. Fire-retardant housing. Connectable conductor cross section solid-core: 6...16
Connectable conductor cross section multi-wired: 6...16
Rated current In: 30
Nominal rated voltage: 400
Type of electrical connection 2: EV000415
Connection position: EV001224
Number of poles: 12
Number of clamp positions per pole: 2
Mounting method: EV005276
Material insulation body: EV003904
Operation temperature: -25...+110
Width/grid dimension: 26.0
Length: 165
Colour: EV000202
Rated insulation voltage U_i : 450
Material clamp: EV000149
Material housing: EV003904
Ambient class: IEK_V0000067
Degree of protection (IP): EV006404
Width: 26
Height: 19
Allowable long-term current: 30
Tightening torque Nm at conductor section: 2,0
Max operating voltage U_e : 400
Type of electrical connection 1: EV000415
Pret: 12,24 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/cleme-sir-zvi-30-6-16mm2-12steam-312908>