


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

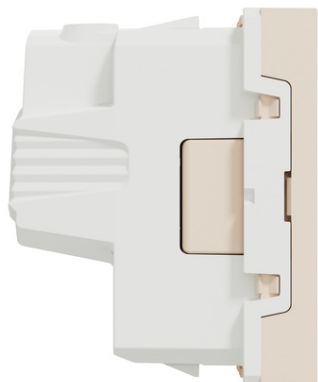

SCHNEIDER FRENCH PRIZA, NEW UNICA, 2PE, 16A OBTURATSAUOSU, BEJ

Schneider Electric New Unica socket-outlet NU303944E is a mechanism in color beige. The outlet pole configuration of this socket-outlet is 2P + E with shutters, ensuring safety protection. And this device is French standard. The dielectric strength, a measure of the electrical strength of a material as an insulator, is 2000V. Its rated current is 16A. The device's fixing mode is clip-in. It is 45 mm in width, It is 45 mm in height, 37 mm in depth. With an embedding depth of 27 mm. Its matching mounting box can be recessed into the surface of the wall with flush type. It reaches IP20 degree of protection which is very high. Besides, it reaches IK01 protection level, which can help protect against impact. This socket-outlet has screw terminals connection terminals. Being made of ASA + PC material, this skin is reliable and resistant. This socket-outlet is 14.1.01/5433, 60058890B, FR.ME63.B02375 AC certified. New Unica includes a suite of new designs, colors and materials. Users benefit from beautiful design that match their style and innovative products. New Unica is designed with clever features to be flexible, easy to understand and quick to install providing solutions for all customers requirements. Main Range - New Unica

Device application - Power supply

Product or component type - Socket-outlet

device presentation - Mechanism

Socket number - 1

Outlet poles configuration - 2P + E

outlet standard - French

Outlet standard description - Pin earth

Complementary

Cover type - With shutter

device mounting - Flush

Rated current - 16 A

[Ue] rated operational voltage - 250 V

Network type - AC

Network frequency - 50/60 Hz

Number of modules - 2 modules

Fixing mode - Clip-in

Colour tint - Beige (RAL 1013)

Connections - terminals - Screw terminals

Cable cross section - 0.5-4 mm² - cable stiffness: flexible

0.5-4 mm² - cable stiffness: rigid

Minimum load breaking capacity - 100 operations 1.25 In and 1.1 Un, cos phi = 0.6

Electrical durability - 10000 cycles, cos phi = 0.8

Insulation resistance - > 5 MOhm at 500 V

Dielectric strength - 2000 V

Material - PC: mechanism cover

Zamak: fixing frame

PC (polycarbonate) GF10 FR: casing

Surface finish - Glossy

Quantity per set - Set of 1 flow-pack

Standards - IEC 60884-1

UNE 20315-1-1

UNE 20315-1-2

NF C 61-314

Product certifications - AENOR

NF

Embedding depth - 27 mm

Depth - 37 mm

Width - 45 mm

Height - 45 mm

Net weight - 0.0362 kg

Surface treatment - Untreated

Resistance to chemical agents - Resistant to alcohol (70 %)

Resistant to alcohol (96 %)

Resistant to A-Lactic Acid

Resistant to diluted quaternary ammonium

Resistant to diluted bleach

Resistant to diluted ammonia

Resistant to soapy water

Resistant to crystal cleaner

Resistant to hydrogen peroxide 10 volumes

Resistant to hexane

Environment

Ambient air temperature for operation - -5 to 35 A°C

Ambient air temperature for storage - -5 to 50 A°C

IK degree of protection - IK01

IP degree of protection - IP20

Environmental characteristic - Bleach

Petrol

Liquid soap

Alcohol

Window-cleaning fluid

UV resistant

Acetone

Oil

Packing Units

Unit Type of Package 1 - PCE

Number of Units in Package 1 - 1

Package 1 Height - 4.0 cm

Package 1 Width - 4.5 cm

Package 1 Length - 4.5 cm

Package 1 Weight - 34.0 g

Unit Type of Package 2 - BB1

Number of Units in Package 2 - 10

Package 2 Height - 6.0 cm

Package 2 Width - 14.0 cm

Package 2 Length - 26.0 cm

Package 2 Weight - 408.0 g

Unit Type of Package 3 - S04

Number of Units in Package 3 - 240

Package 3 Height - 30.0 cm

Package 3 Width - 40.0 cm

Package 3 Length - 60.0 cm

Package 3 Weight - 10.44 kg

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/french-priza-new-unica-2pe-16a-obturatsausu-bej-318931>